


Nemaband Right Reducer

1/2

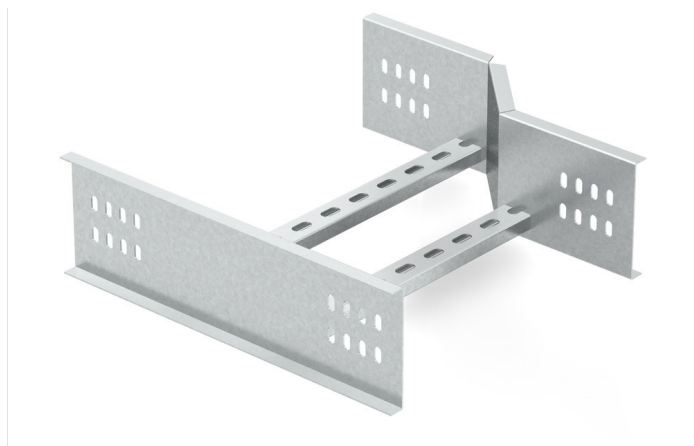

Description

Metal accessory for creating a right offset reduction in the wiring installation with the Nemaband® ladder. 150mm reduction. It allows changes in the width of different sections to be made very easily using a single piece. Made from steel with GC Protection system.

Advantages

It allows the creation of width changes to adapt to the demands of each electrical installation.

Available in 100 and 150 mm height and 150, 300, 450, 600, 750 and 900 mm wide.

Precise adjustment and maximum resistance.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating width reductions in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 GC	 Class 8	 100, 150	 300, 450, 600, 750, 900	 300	 1	 Steel with surface coating	 20 J
 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001011					

Product data

			Ref	kg/u
100	300	150	82003096	2,940
100	450	300	82003097	3,400
100	600	450	82003098	3,850
100	750	600	82003099	4,310
100	900	750	82003100	4,770
150	300	150	82003101	3,820
150	450	300	82003102	4,270
150	600	450	82003103	4,730
150	750	600	82003104	5,180
150	900	750	82003105	5,640

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

