


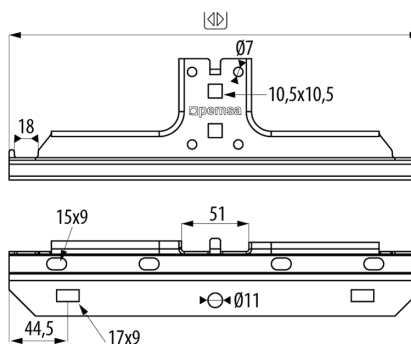

Description

Advantages

Ceiling fixing using 41x41 and 41x21 channels in the central part of the cable ladder, making it easier to lay and install cables thanks to the sides of the cable ladder are free.

Load values according to international standard IEC 61537.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

CE conformity in accordance to the low voltage directive 2014 /35 /UE.

Applications

Suitable for supporting medium loads in ceiling-mounted cable ladders for electrical and/or telecommunications installations in: Civil works, tunnels, car parks, public buildings, shopping centres, large infrastructures such as: Airports, metro and train lines, and in the tertiary sector and industrial applications such as naval, textile, chemical and food, depending on the protection system.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 PG3, Pregalvanised, HDG, Hot Dip Galvanised	 150, 200, 300, 400, 500, 600	 4	 Steel with surface coating	 -50 / 150 °C
 A1 No combustible	ETIM 10 EC001003			

Product data

				Ref	kg/u
PG	PG3, Pregalvanised	Class 3	150	82004210	0,267
PG	PG3, Pregalvanised	Class 3	200	82004212	0,346
PG	PG3, Pregalvanised	Class 3	300	82004213	0,499
PG	PG3, Pregalvanised	Class 3	400	82004214	0,655
PG	PG3, Pregalvanised	Class 3	500	82004215	0,813
PG	PG3, Pregalvanised	Class 3	600	82004216	0,967
GC	HDG, Hot Dip Galvanised	Class 6	150	82004217	0,280
GC	HDG, Hot Dip Galvanised	Class 6	200	82004218	0,363
GC	HDG, Hot Dip Galvanised	Class 6	300	82004219	0,525
GC	HDG, Hot Dip Galvanised	Class 6	400	82004220	0,688
GC	HDG, Hot Dip Galvanised	Class 6	500	82004221	0,854
GC	HDG, Hot Dip Galvanised	Class 6	600	82004222	1,012

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

