


## Fast Hold Down Bracket ( Ref: 81000258 )

1/17

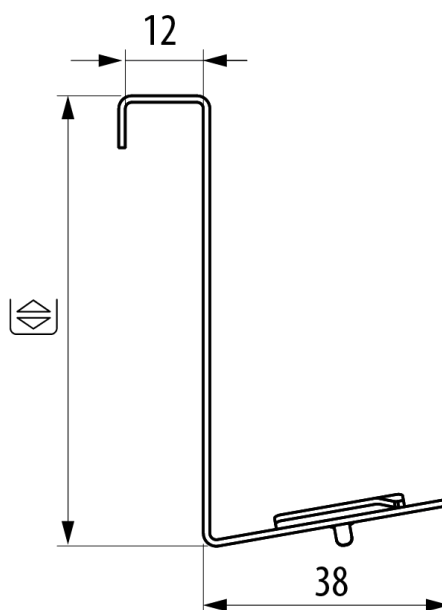

### Description

Fast hold down clamp for fixing cable ladder and cable trays to 41x21 and 41x41 channel and cantilever arms in both ceiling and wall installations. Of 150 mm height, With GC protection system. It facilitates the connection to the strut without additional screws thanks to the lower twist and lock part

### Advantages

No screws or other fasteners required. 50% savings on installation costs

Wide range. Available in heights of 35, 60, 85, 100, 120 and 150mm

In accordance with CE standard with respect to directive 2014/35 / EU

Quick connection without screws to channel and strut in only two steps

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537

### Applications

Used for the connection of Pemsaband cable trays and Megaband® One cable ladders to 41x21 and 41x41 channel for installations of the ladder from the ceiling or to the wall in the management and distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector etc.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Fast Hold Down Bracket ( Ref: 81000258 )

| Product data                          |             |                                |                            |
|---------------------------------------|-------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001005    | u                              | 10                         |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 0,107       | Material                       | Steel with surface coating |
| Protection System                     | GC          | Working temperature range (°C) | -50 / 150 °C               |
| Finish                                | Zinc Nickel | Fire resistance                | A1 No combustible          |
| Resistance Class                      | Class 8     |                                |                            |
| Flange (mm)                           | 150         |                                |                            |
| kg/u                                  | 0,041       |                                |                            |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |


| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |



**Fast Hold Down Bracket** ( Ref: 81000258 )

3/17

**Product applications**

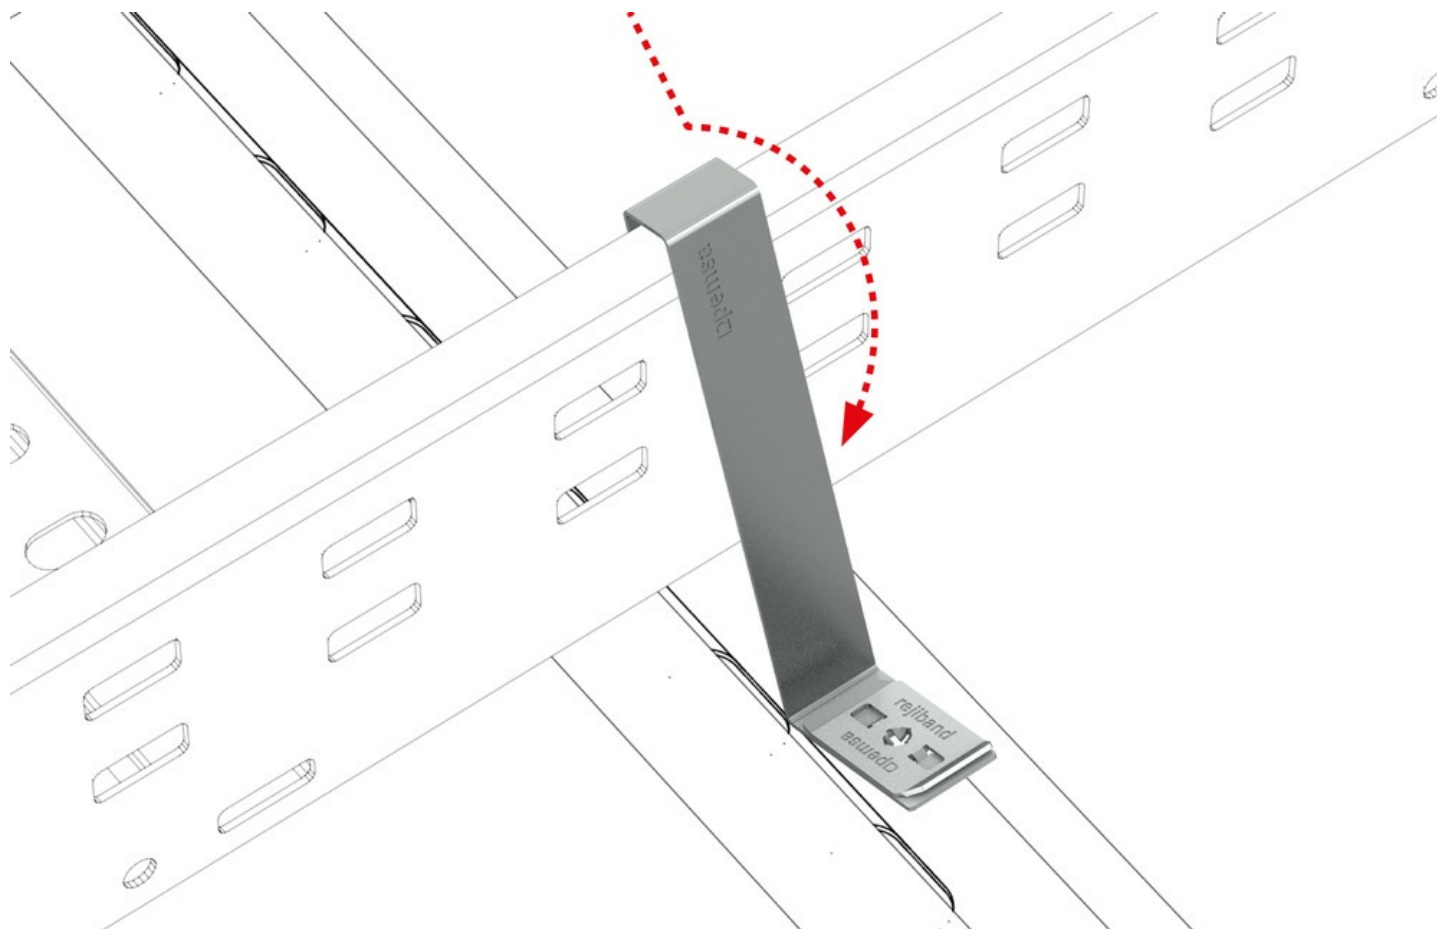


[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


**Fast Hold Down Bracket** ( Ref: 81000258 )

4/17

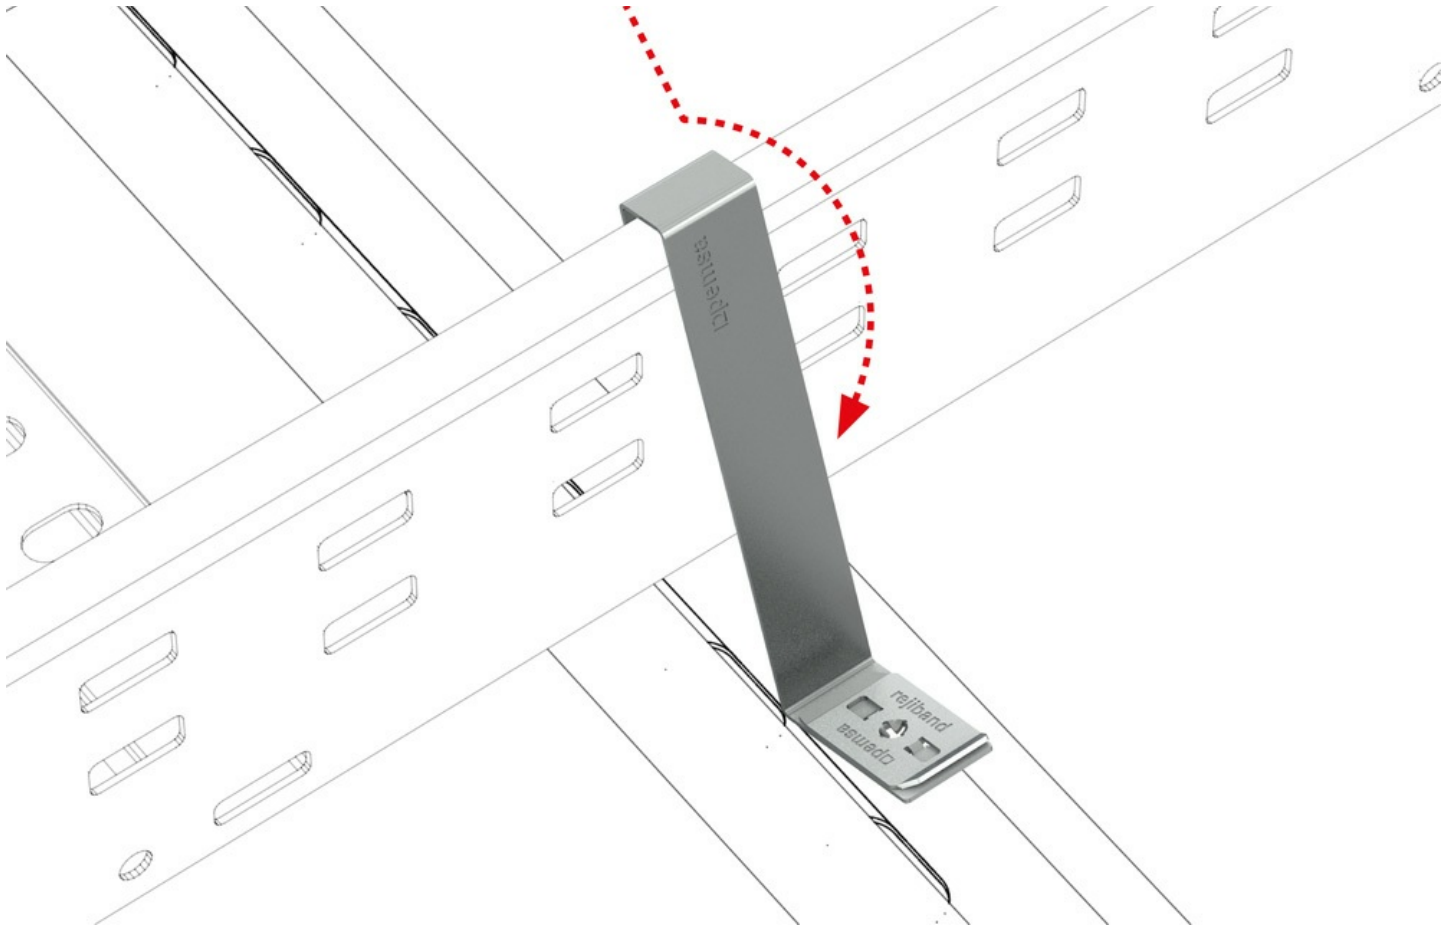


**Fast Hold Down Bracket** ( Ref: 81000258 )

5/17

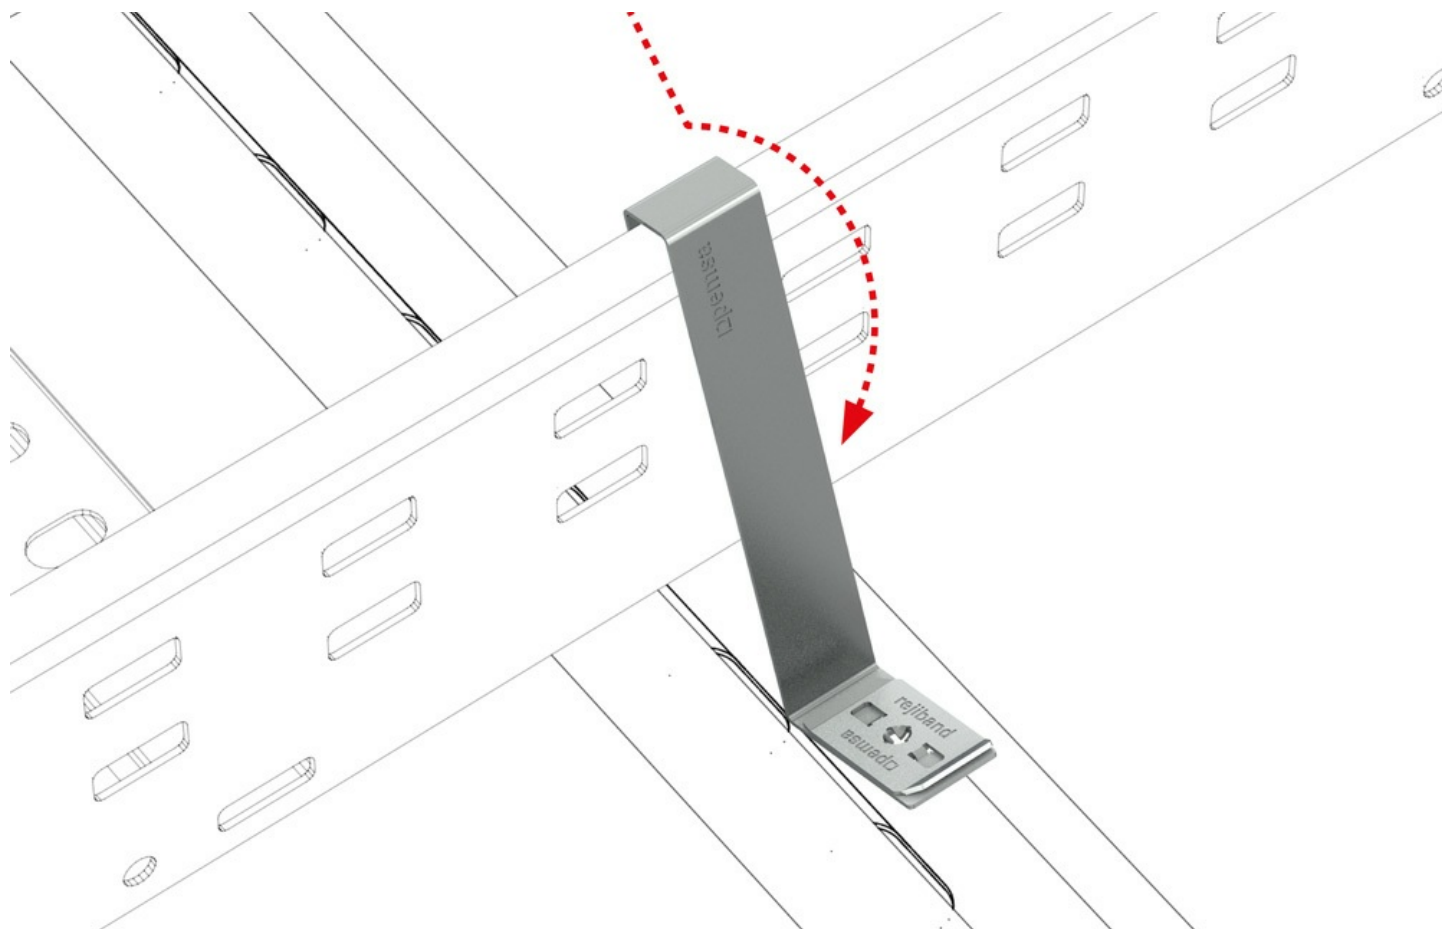


**Fast Hold Down Bracket** ( Ref: 81000258 )

6/17

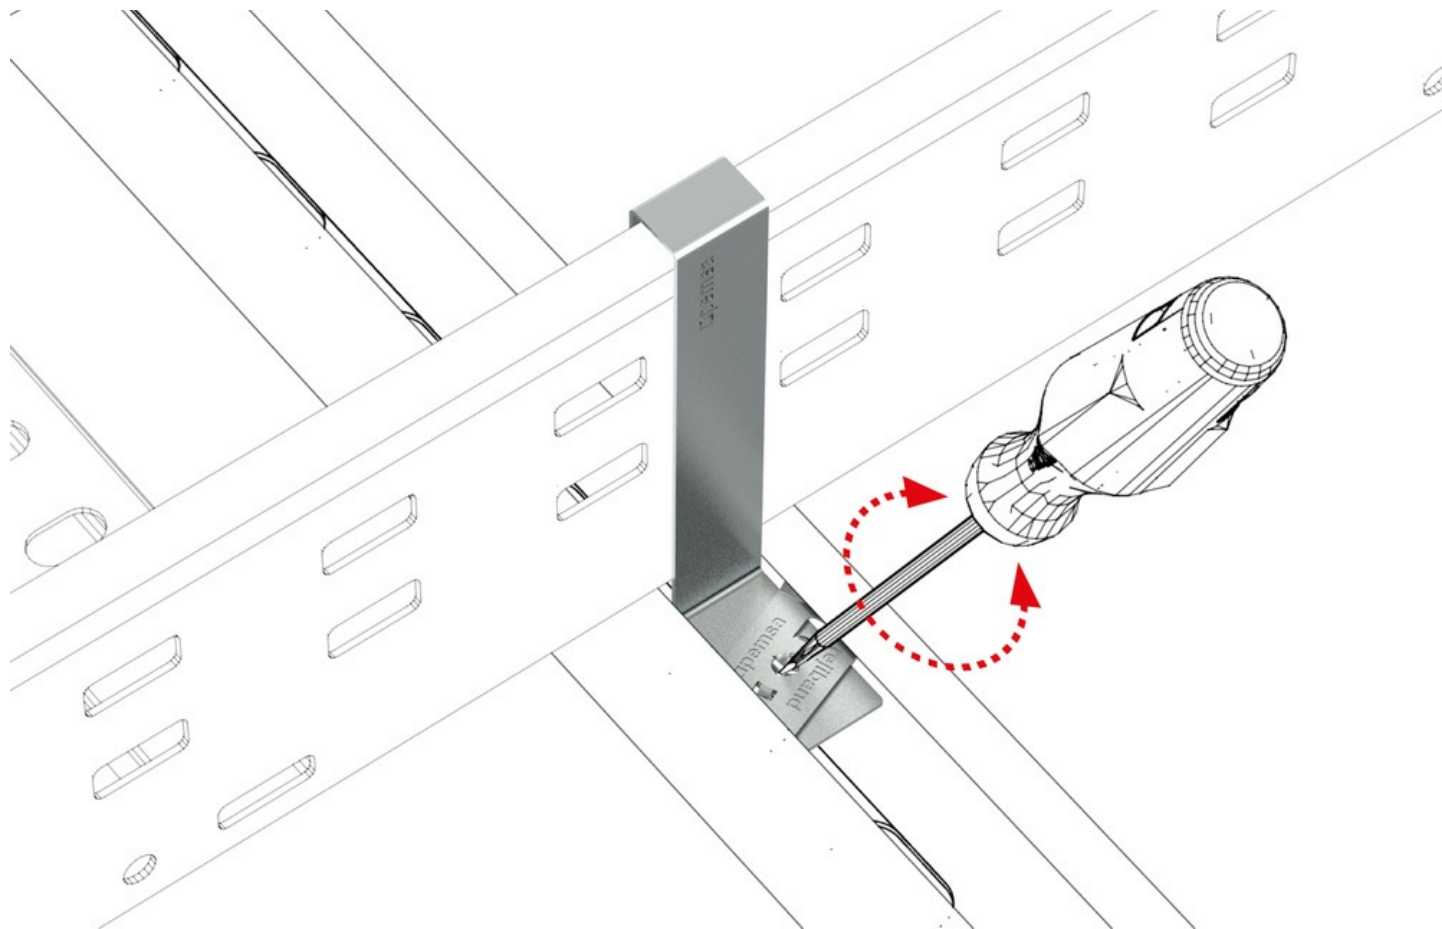


**Fast Hold Down Bracket** ( Ref: 81000258 )

7/17

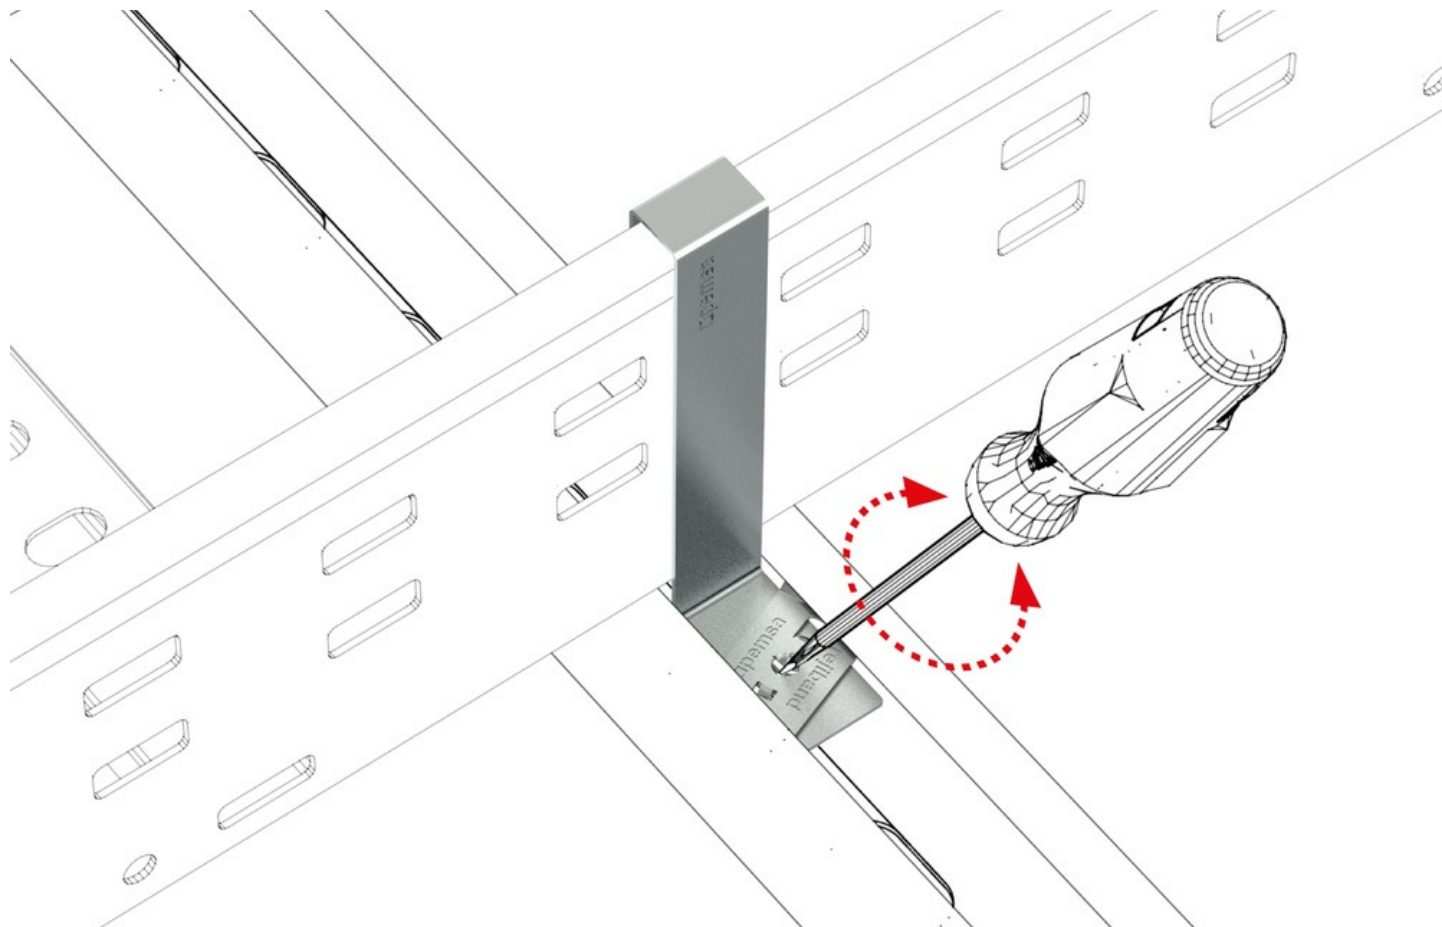


**Fast Hold Down Bracket** ( Ref: 81000258 )

8/17

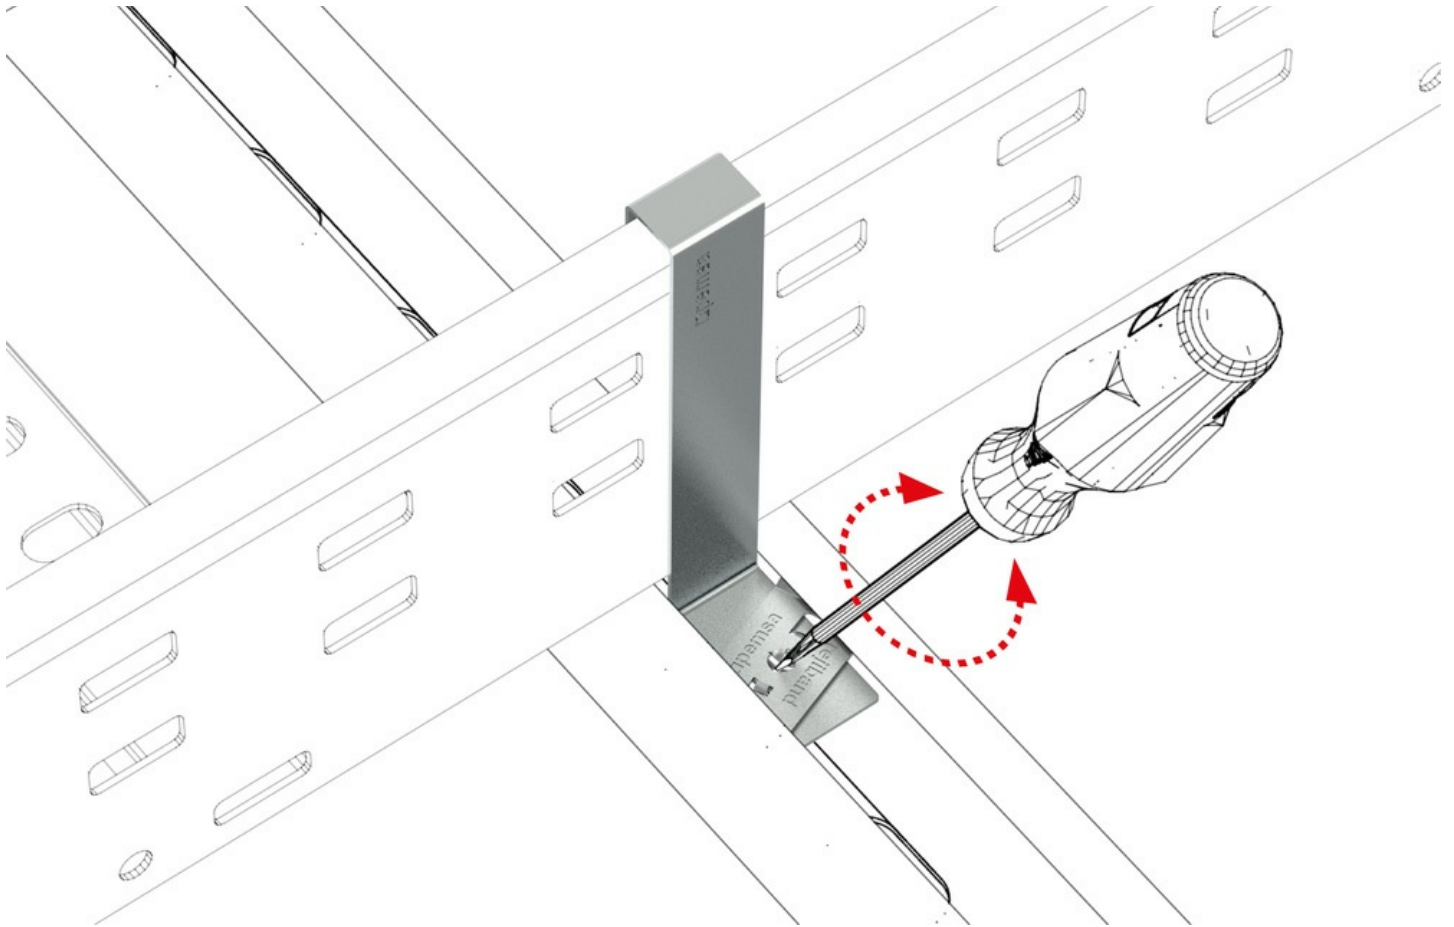


**Fast Hold Down Bracket** ( Ref: 81000258 )

9/17

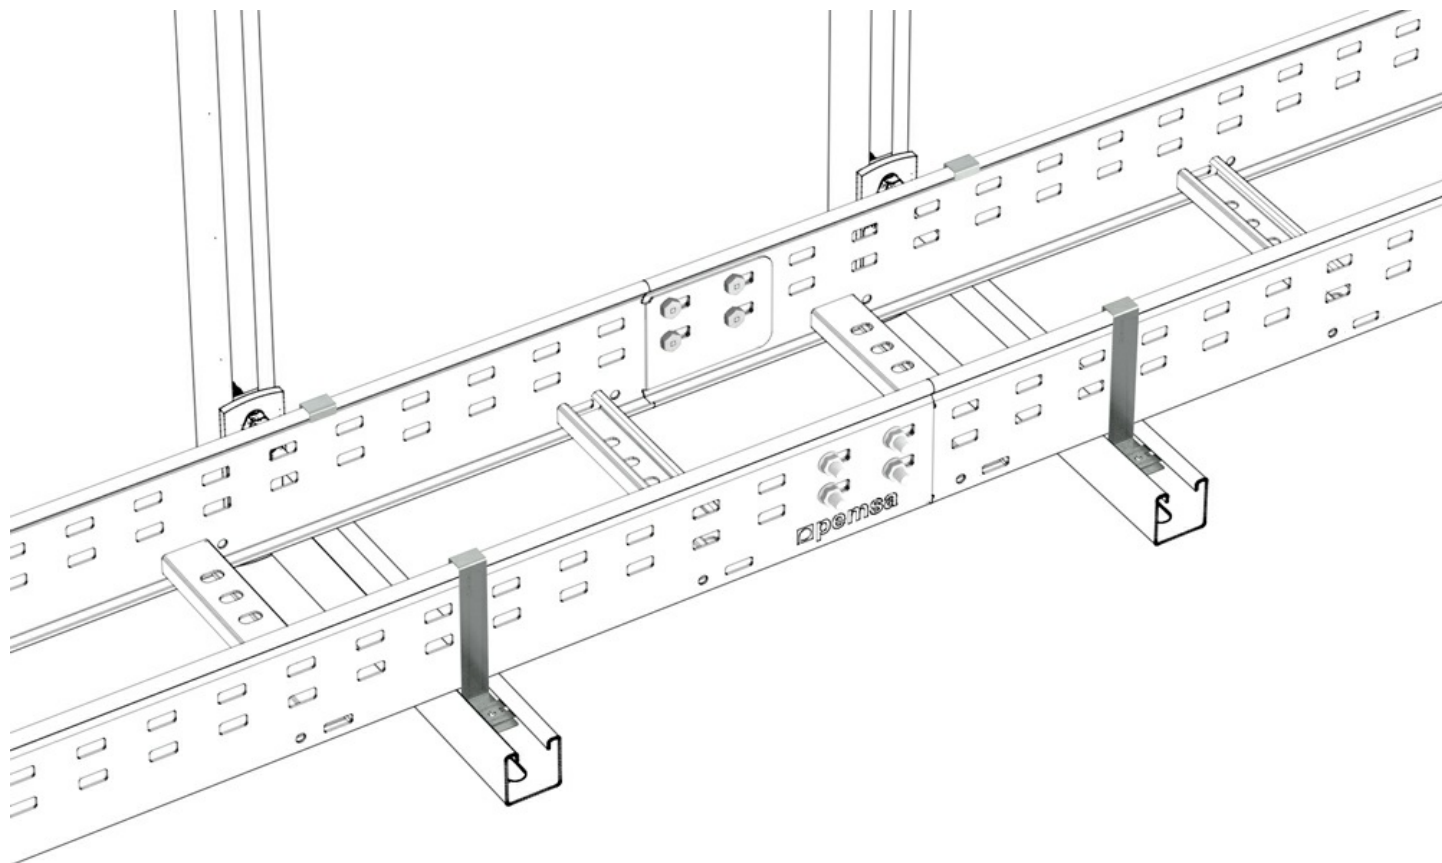


**Fast Hold Down Bracket** ( Ref: 81000258 )

10/17

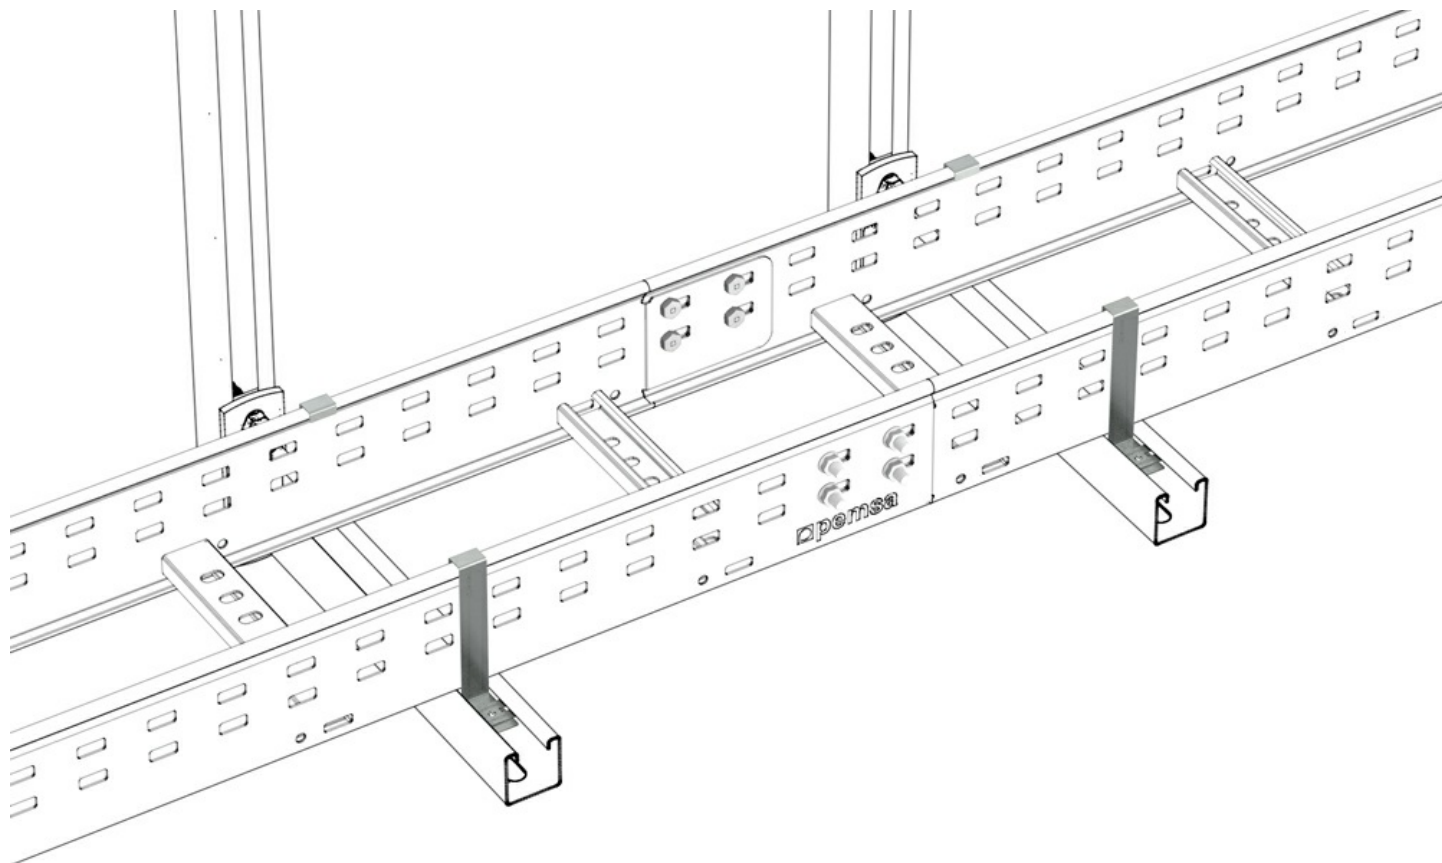

**Fast Hold Down Bracket** ( Ref: 81000258 )

11/17

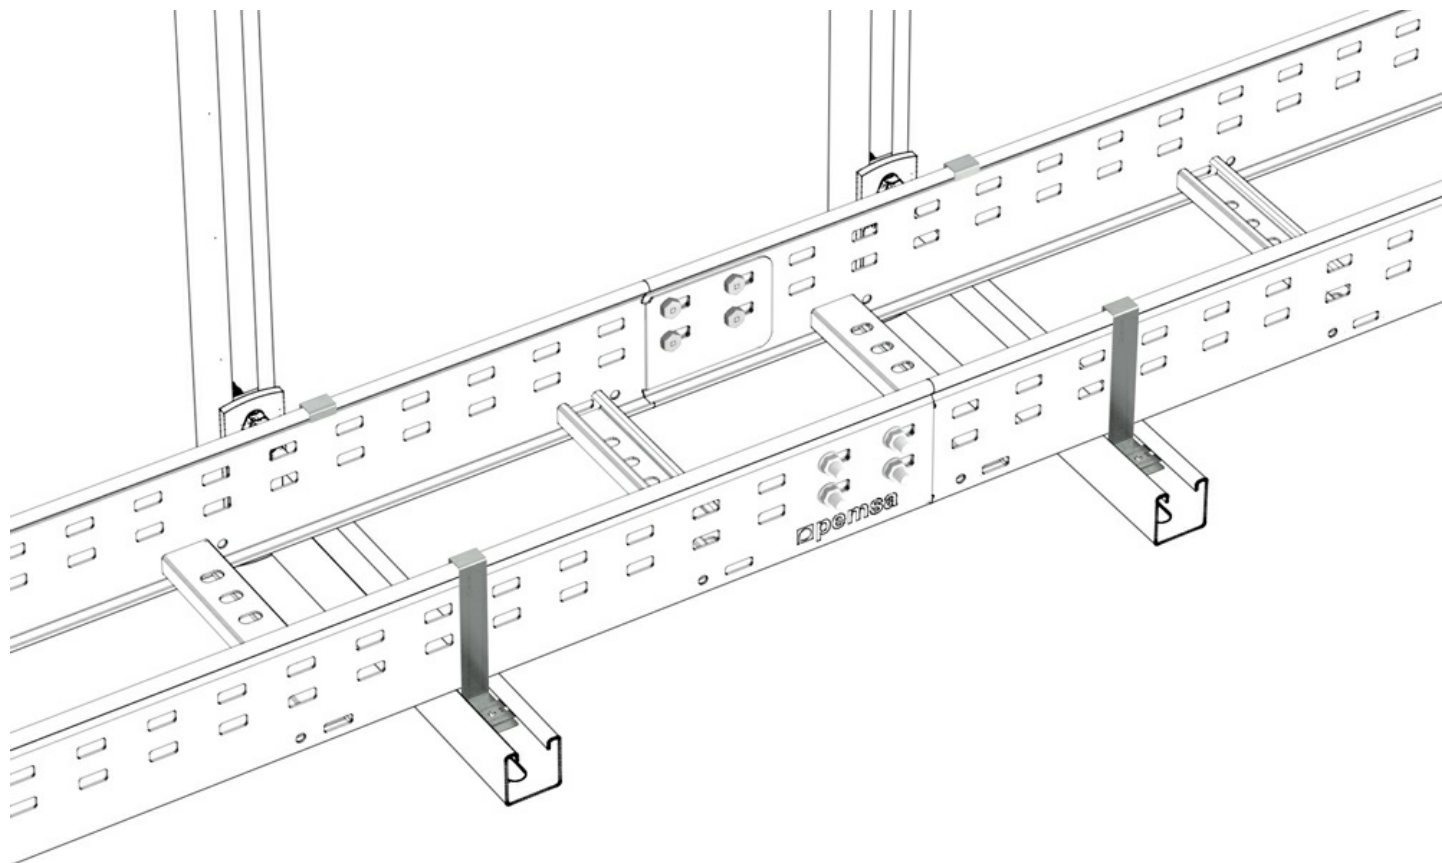


[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


**Fast Hold Down Bracket** ( Ref: 81000258 )

12/17

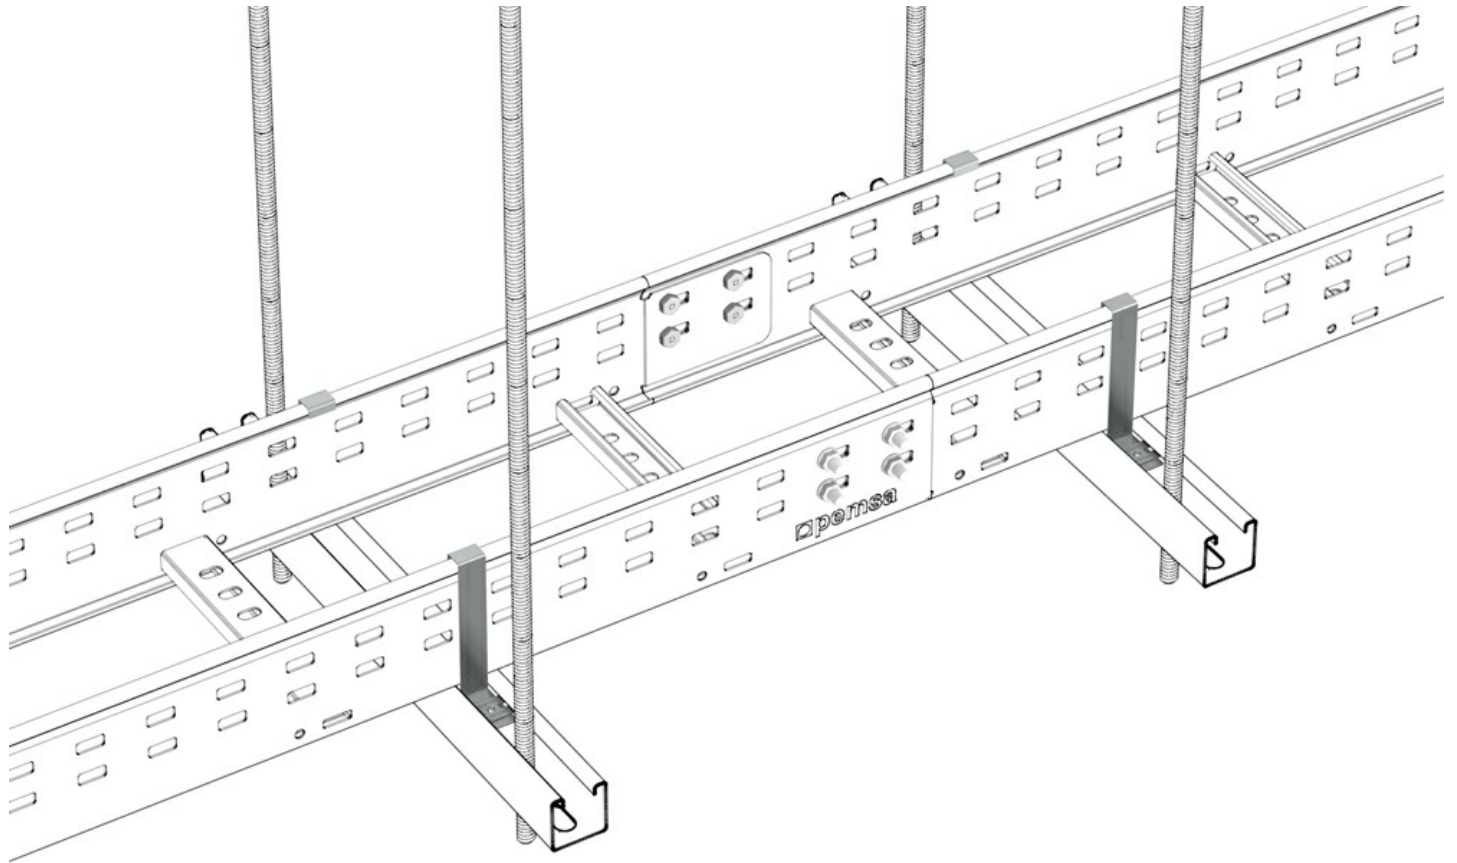


**Fast Hold Down Bracket** ( Ref: 81000258 )

13/17

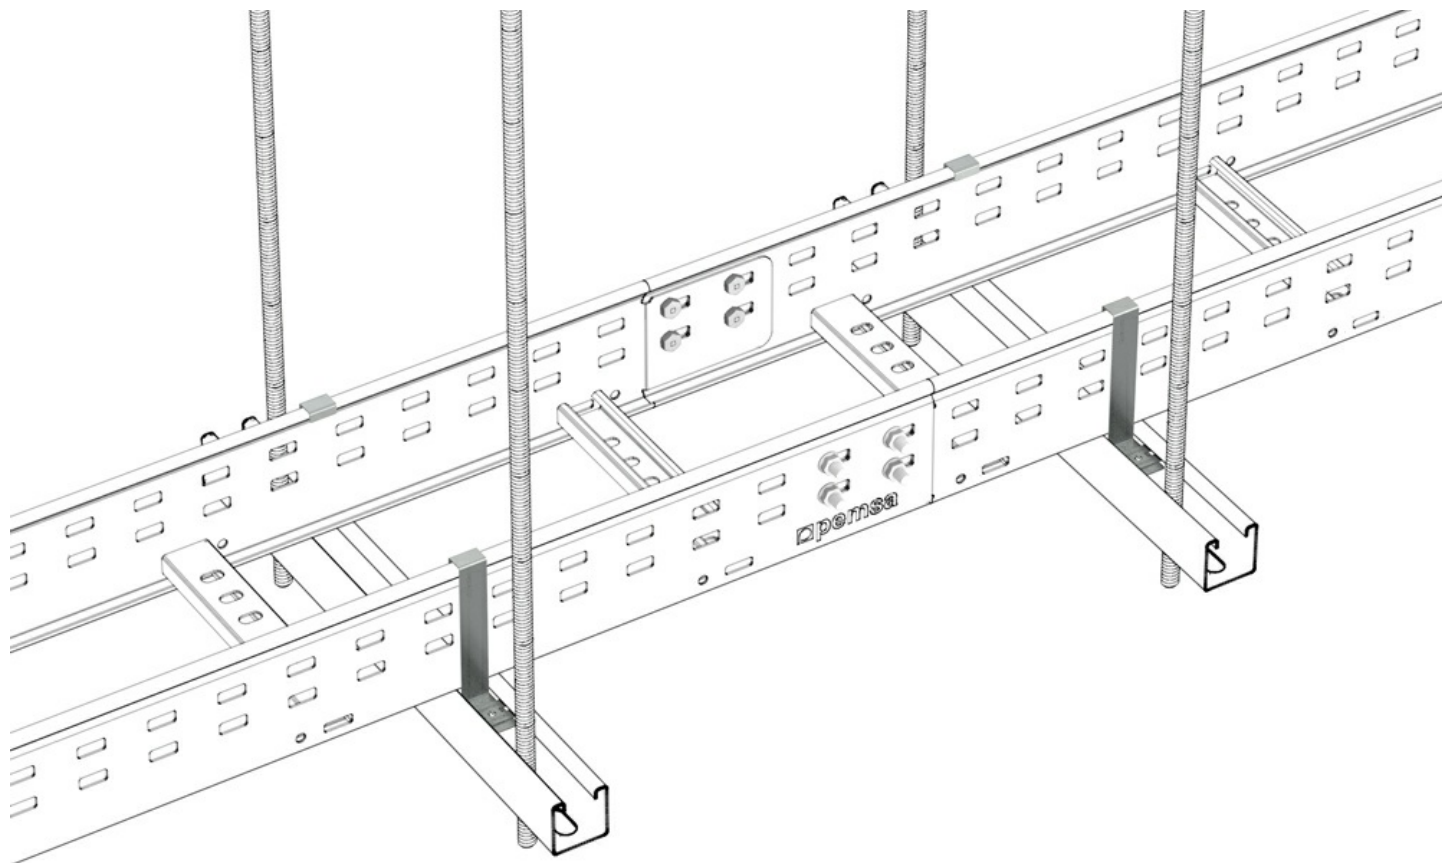


**Fast Hold Down Bracket** ( Ref: 81000258 )

14/17

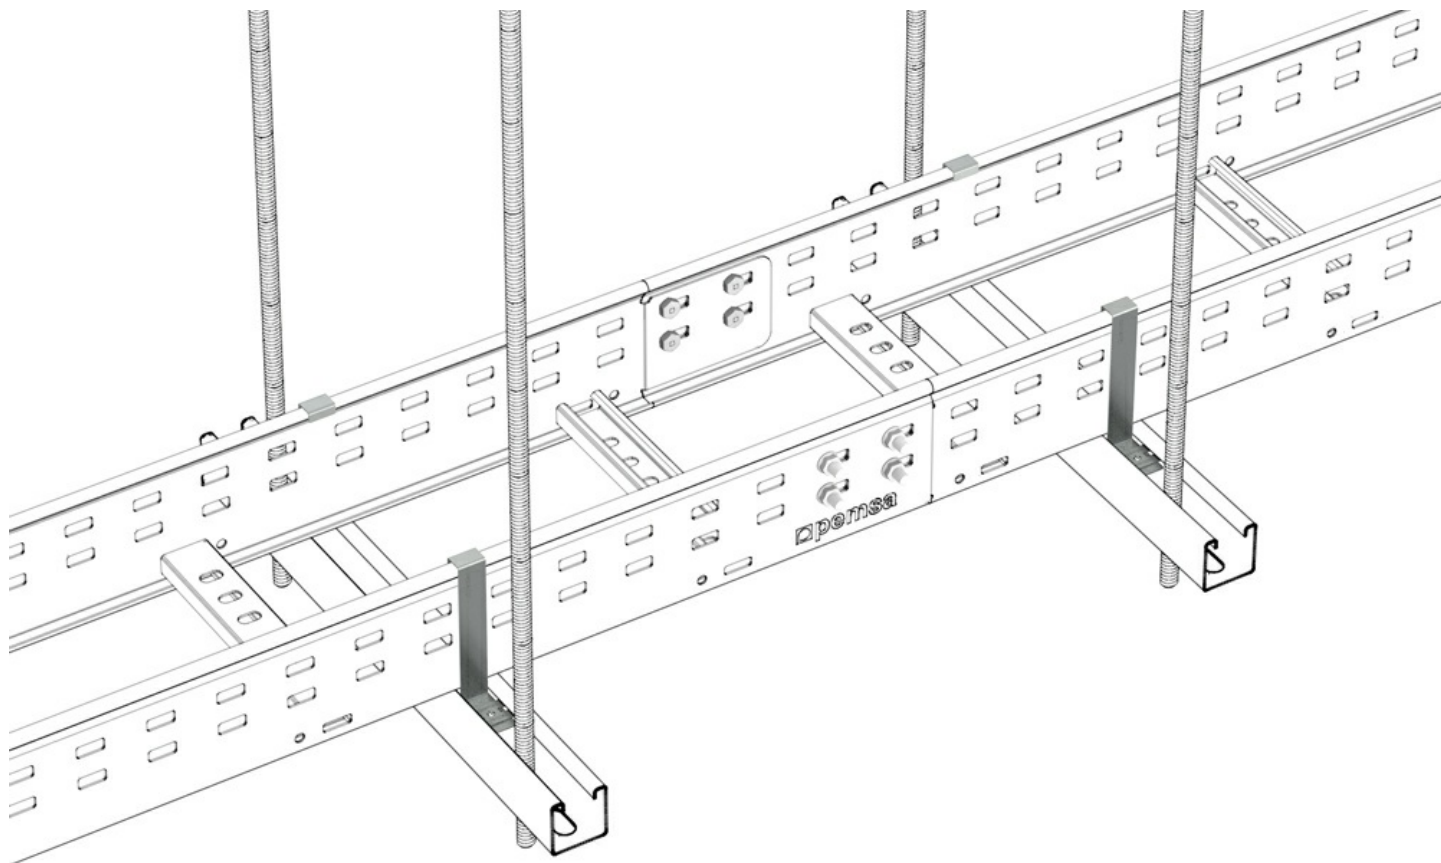


**Fast Hold Down Bracket** ( Ref: 81000258 )

15/17

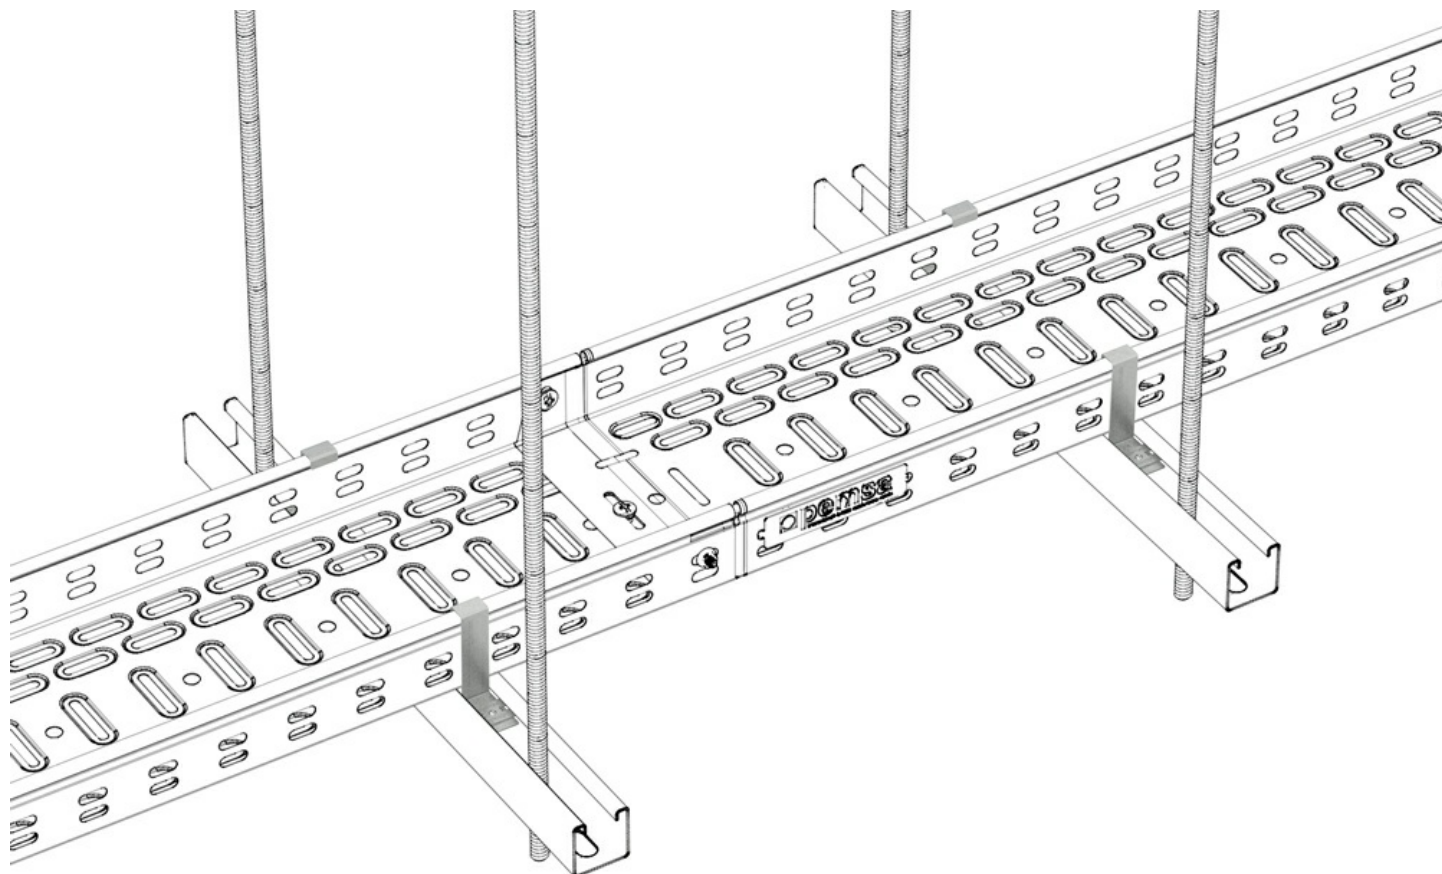

**Fast Hold Down Bracket** ( Ref: 81000258 )

16/17

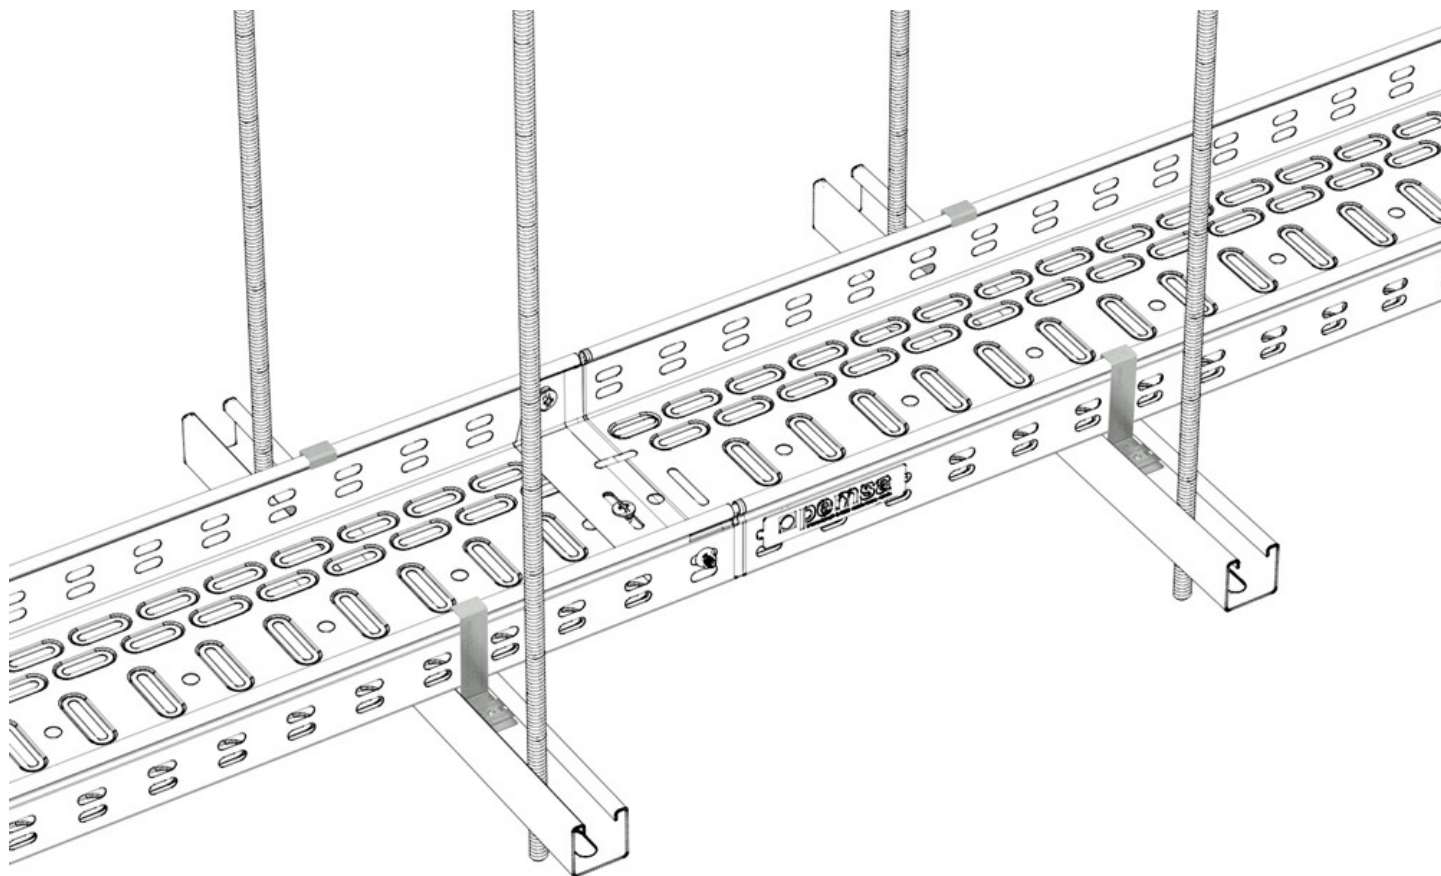

**Fast Hold Down Bracket** ( Ref: 81000258 )

17/17

