


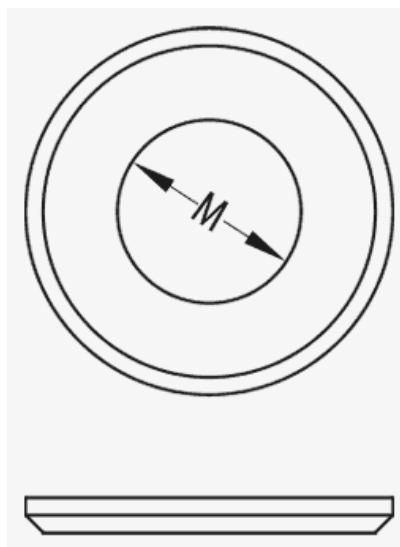

Description

Flat metal washer for assembly with nut and bolt in the fixing of trays. M 8, M 8, With GC protection system, ZNI finish. Available in M8 and M10. Made of steel with different Protection Systems.

Advantages

CE conformity to directive 2014/35 / EU.

Available in two sizes: M8 and M10.

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

Stronger fixing preventing the bolt from loosening.

Applications

Suitable for fixing accessories, supports and structures in wall and ceiling assemblies for trays in electrical wiring and / or telecommunications.

Solutions



ETIM 10

EC000098

Huella de CO2. GWP A1-A3 (kg CO2 eq.)

Protection System

GC

Finish

Zinc Nickel

Resistance Class

Class 8

M/PG

M 8

kg/u

0,002

u

100

Material

Steel with surface coating

Working temperature range (°C)

-50 / 150 °C

Fire resistance

A1 No combustible

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsas®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsas®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsas, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsas Cable Management, S.A."