


Metatray riser/dropper

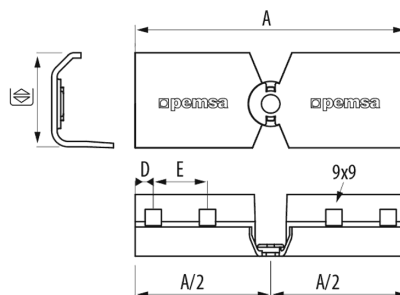

Description

Joint for creating inside and outside risers in insulating material. Grey RAL 7035 colour for easily and quickly creating changes of planes with variable angles.

Advantages

It allows the creation of inside and outside risers thanks to its articulation.

Variable angle from -45° to $+45^\circ$.

Use with DIN603 M8 Metatray insulating screw kit. Ref 81000298.

Insulating material, electrical safety and reduced maintenance costs.

CE conformity to directive 2014/35 / EU.

Applications

Suitable for creating inside and outside risers for Metatray insulating trays in the routing of cables in electrical and telecommunications installations in different sectors from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that meets the most demanding standards. Its application is also ideal in other different sectors: service, telecommunications, electric mobility through vehicle charging stations etc.

Solutions



Main technical characteristics

 Colour	Grey RAL 7035		60, 100		8		-20 / 60 °C		GRADO UL94: V0		Resistant acc. to UL568	ETIM 10 EC002413
---	---------------	---	---------	---	---	---	-------------	---	----------------	--	-------------------------	------------------

Product data

	Ref	kg/u
60	81000286	0,065
100	81000287	0,152

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Product applications



