


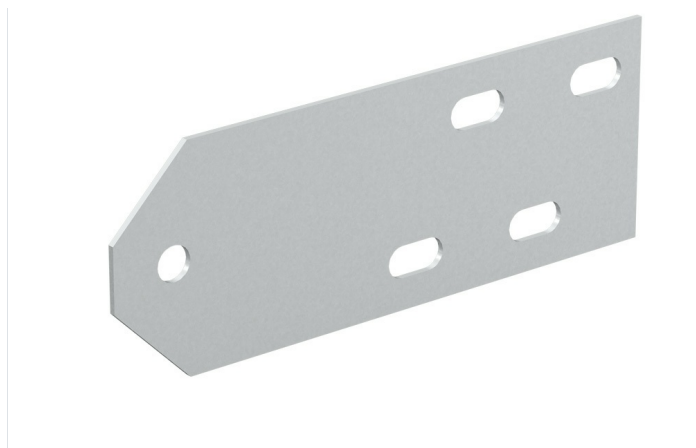

Description

Articulated riser dropper for creating level changes, with adjustable angles, for Nemaband® ladder. It allows angles of descent and height changes at angles of 30°, 45°, 60° & 90° with great ease. Made from steel with GC Protection system.

Advantages

Thanks to the articulation it allows the creation of level changes.

Use Nemaband® M8 joint kit screws or M8 hex nuts.

Electrical continuity guaranteed according to standard IEC61537.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating adjustable angle level changes in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Main technical characteristics

 GC	 Class 7	 100, 150	 20	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible
ETIM 10						
EC002413						

Product data

	Ref	kg/u
100	82002743	0,200
150	82002744	0,251

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic