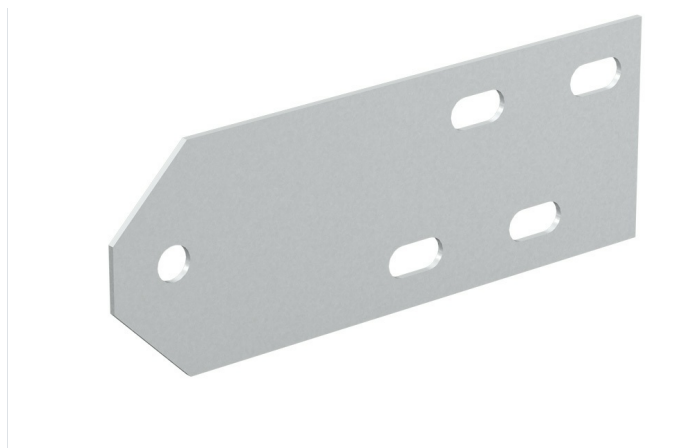


Description

Articulated riser dropper for creating level changes, with adjustable angles, for Nemaband® ladder. Of 100 mm height. It allows angles of descent and height changes at angles of 30°, 45°, 60° & 90° with great ease. Made from steel with GC Protection system.

Advantages

Electrical continuity guaranteed according to standard IEC61537.

Thanks to the articulation it allows the creation of level changes.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Use Nemaband® M8 joint kit screws or M8 hex nuts.

Applications

Suitable for creating adjustable angle level changes in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



ETIM 10	EC002413
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,519
Protection System	GC
Finish	HDG, Hot Dip Galvanised
Resistance Class	Class 7
Flange (mm)	100
kg/u	0,200

u	20
Material	Steel with surface coating
Working temperature range (°C)	-50 / 150 °C
Fire resistance	A1 No combustible

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

