
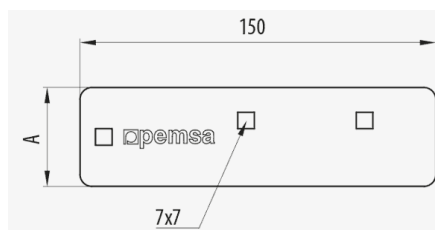


PEMSAband Riser / Dropper

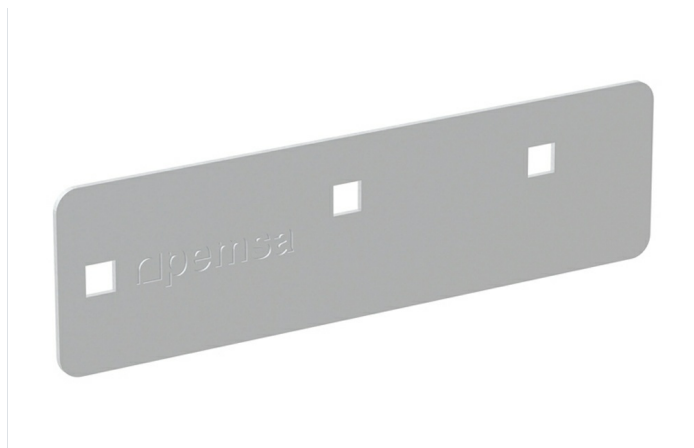

Description

Connector for joining between two sections of Pemsaband® tray of heights 35 and 60 mm. Thanks to its articulation it allows for the creation of level changes between two sections of Pemsaband® trays with just the use of screws. Manufactured in steel and available in GC and PG Protection Systems.

Advantages

Its unique design allows the articulation of different sections using only 4 pieces.

Connection between two tray sections at different levels.

Electrical continuity guaranteed according to standard IEC61537.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Applications

Suitable for joining straight lengths of Pemsaband® One perforated and solid tray of widths 300-600 mm, for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Main technical characteristics					
 35, 60	 4	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC002413

Product data				
				kg/u
PG	Class 3	35	71021006	0,031
PG	Class 3	60	71022006	0,074
GC	Class 5	35	71031006	0,032
GC	Class 6	60	71032006	0,078

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

