
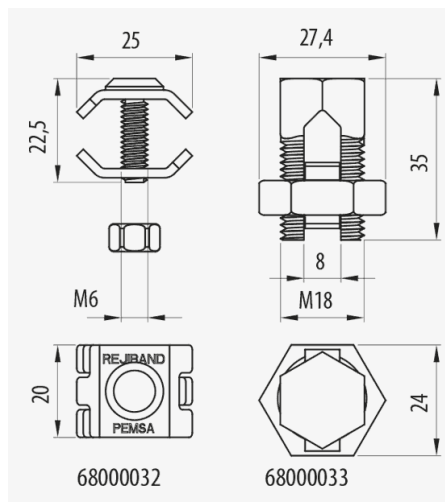


Bonding Connector (Ref: 68000033)

1/6

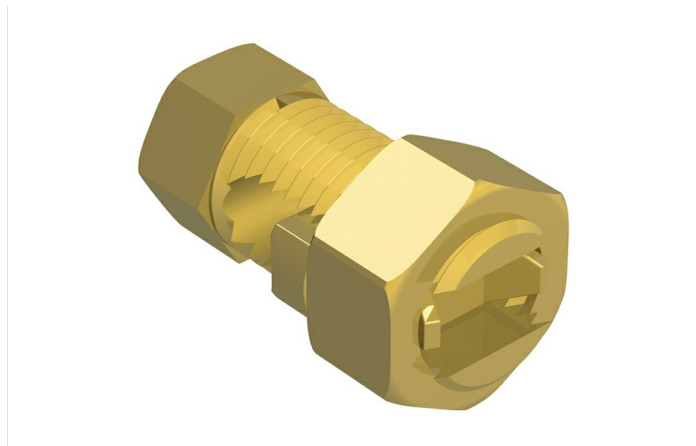

Description

Brass terminal for the equipotential bonding of the Rejiband® trays or for connection to the protective conductor and earthing of the electrical installation. Cables of 35-45 mm² of section, Of 6.5 / 7.5 mm of maximum diameter, With LTN protection system

Advantages

Ensures the equipotentiality of the continuous sections of Rejiband®.

Economical and reliable design.

It facilitates the earthing of the Rejiband® tray.

Select the reference according to the size of the conductor.

Applications

It is used for the equipotential connection of the Rejiband® trays or for their connection to the protective conductor and earthing of the electrical installation.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Bonding Connector (Ref: 68000033)


Product data			
ETIM 10		EC002935	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		LTN	
Finish		Brass	
Section min (mm2)		35	
Cable diameter range		6.5 / 7.5	
A (mm)		35	
B (mm)		45	
kg/u		0,064	
u		20	
Material		Brass	
Working temperature range (°C)		-50 / 150 °C	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic




Product applications

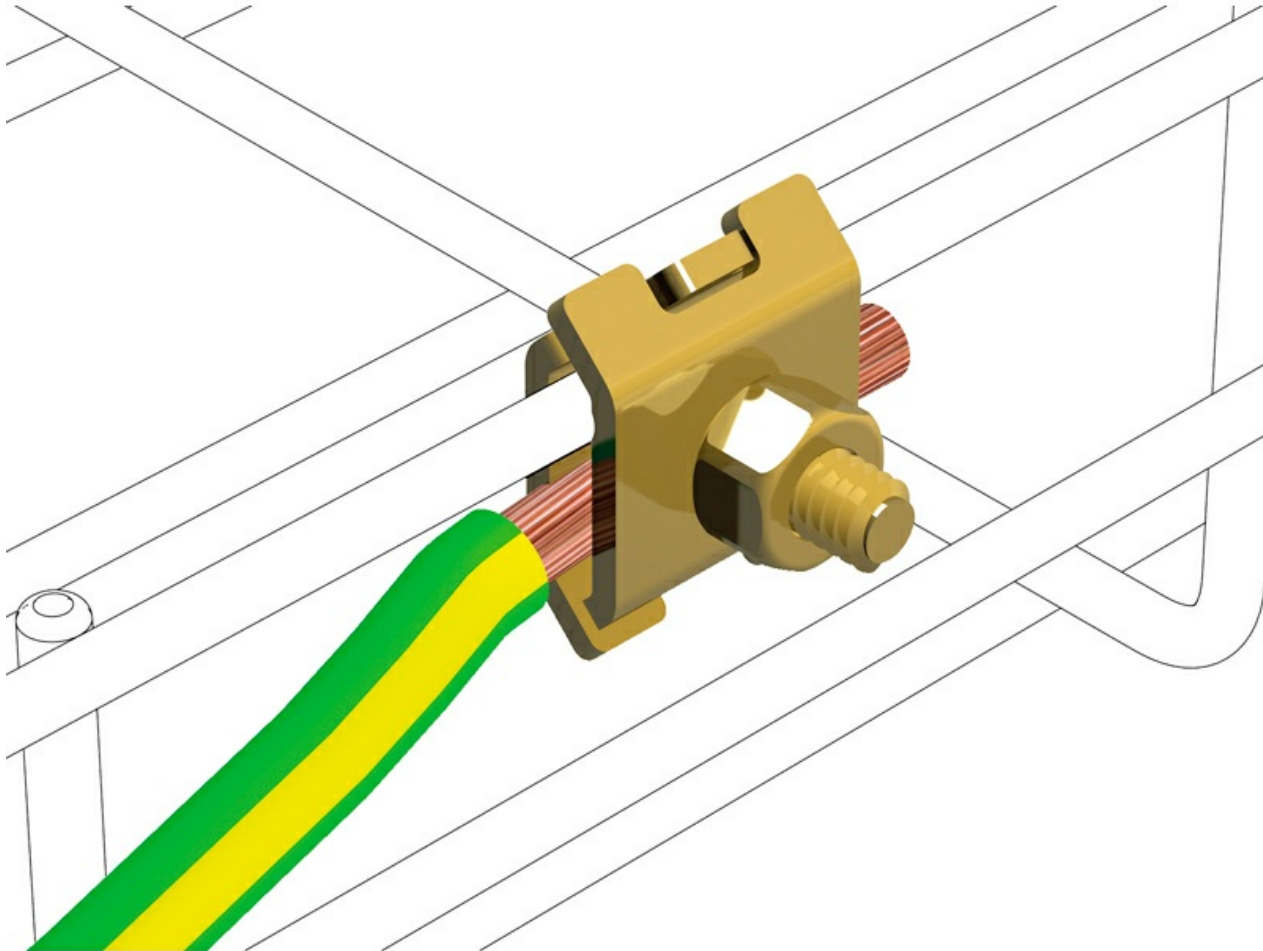


Bonding Connector (Ref: 68000033)

4/6

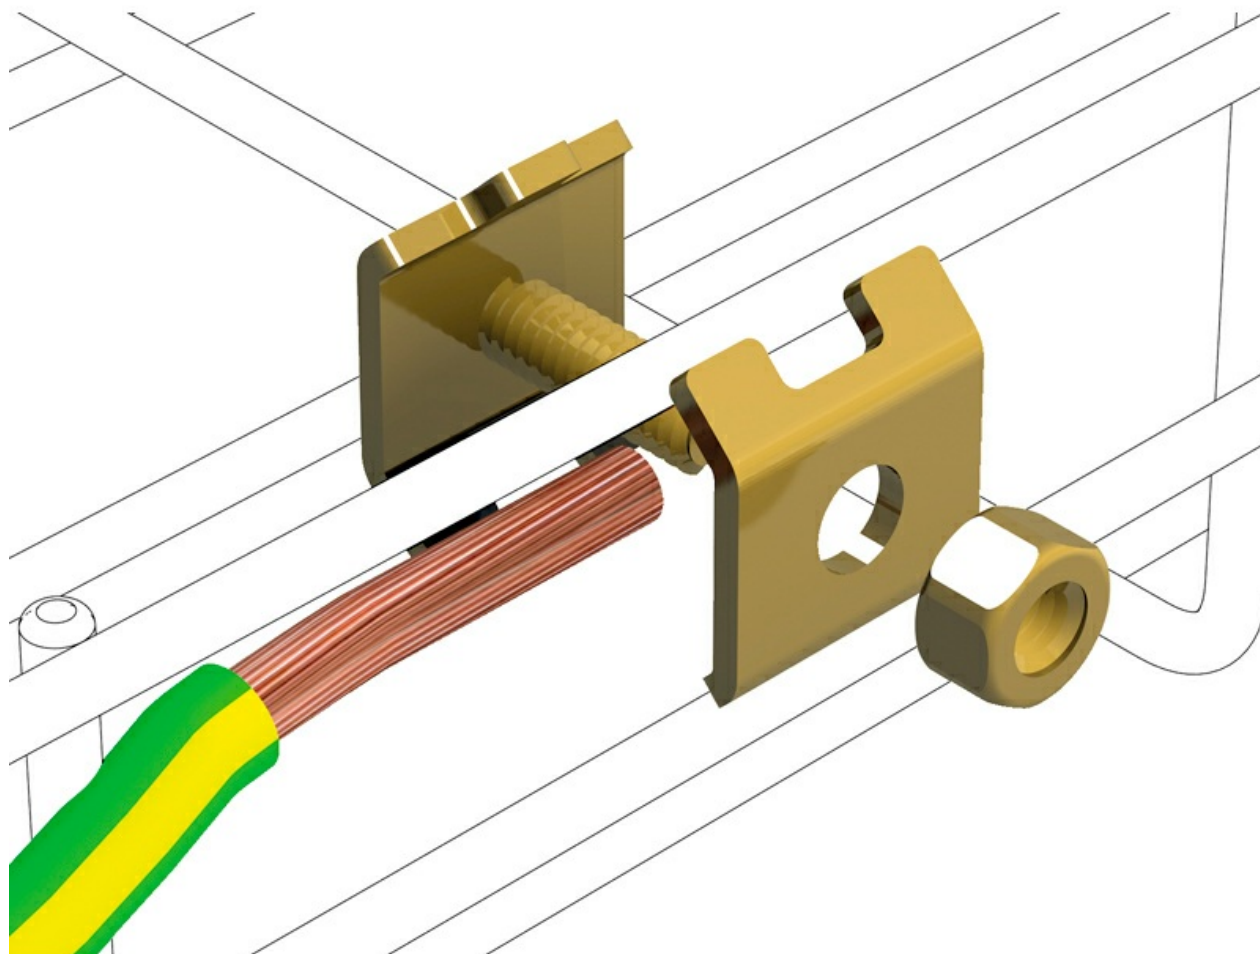

Bonding Connector (Ref: 68000033)

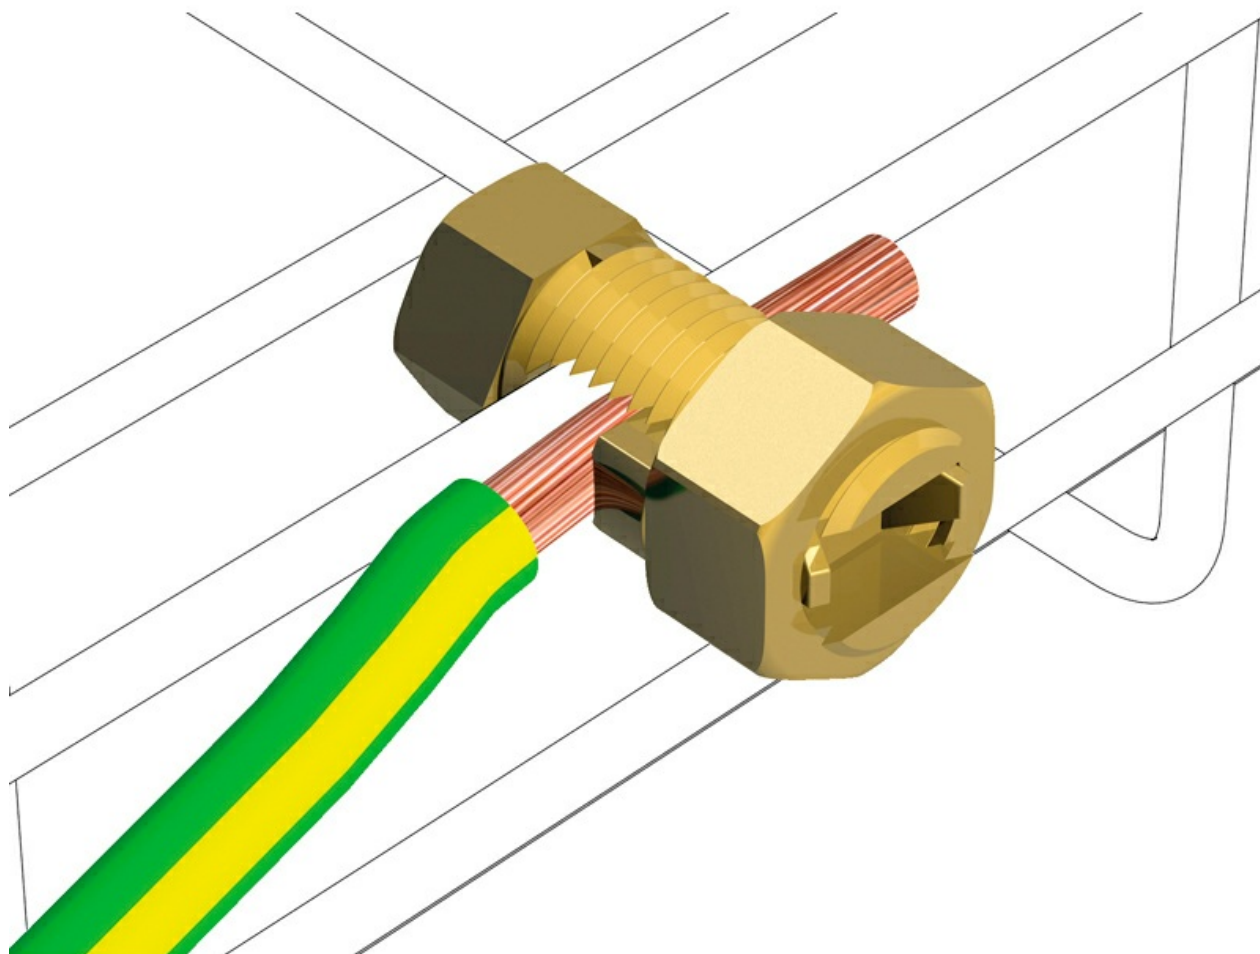

Bonding Connector (Ref: 68000033)

