


Megaband CPS 45° Outside Riser (Ref: 82002316)

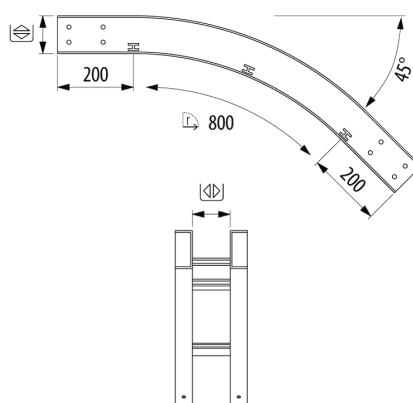

Description

Metal accessory for creating a 45° outside riser in the wiring installation with the Megaband® CPS ladder. Of 100 mm height, Width 300 mm, Angle of 45 °, With AL protection system. It allows descents and height changes to be made with great ease. Radius of curve 200 and 600. Made from Aluminium alloy 6063T6.

Advantages

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Available in 100 mm height and 200, 300, 400 and 600 mm wide.

Made of Aluminum alloy 6063T6. Excellent corrosion resistance.

Only the Megaband® M8 joint kit or M8 nuts and bolts required

Its design allows to make drops and changes of angle at 45° with great ease

Applications

Suitable for cable conduit installations in the Oil & Gas and Petrochemical Industry, Offshore Platforms, Ports and Maritime Applications in general. Industrial projects in aggressive environments and with high corrosion on the coast and seashore, Power Plants and Renewable Energy.

Solutions



Product data

ETIM 10	EC001535	kg/u	5,370
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	1
Protection System	AL	Material	Aluminum
Finish	6063T6 Aluminium	Impact Strength (J)	20 J
Flange (mm)	100	Working temperature range (°C)	-50 / 150 °C
Width (mm)	300	Fire resistance	A1 No combustible
R (mm)	800		
Angle	45		

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic