


Rod Connector

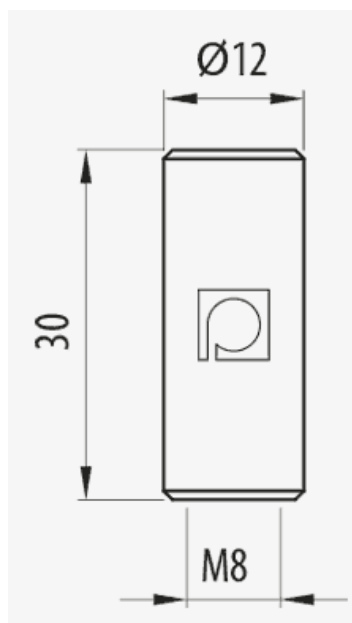

Description

Connector for mounting two threaded rods in order to obtain the suitable length for the installation from the ceiling of the electrical installation, 30 mm long and an external diameter of 12 mm.

Advantages

Joining of sections of 500 mm and 1000 mm M8 rod.

It provides the necessary rigidity so that deformation does not occur.

CE conformity to directive 2014/35 / EU.

BC protection system (standard EN-ISO 2081), gold colour, better corrosion resistance, suitable for indoor installations. Corrosion resistance class 5.

Applications

Used for the joining of M8 threaded rods as a support and ceiling mounting for Rejiband® and Pemsaband® trays in the management and distribution of electrical wiring and/or telecommunications.

Solutions



Main technical characteristics

 M 8, M 6, M10	 50	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001005
---	--	--	--	---	---------------------

Product data

	 61537		Ref	kg/u
EZ	Class 3	M 8	81000443	0,021
EZ	Class 3	M 6	81000503	0,012
BK8	Class 8	M 8	81000505	0,021
EZ	Class 3	M10	81000506	0,039

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Product applications

