


Nemaband 30° Bend

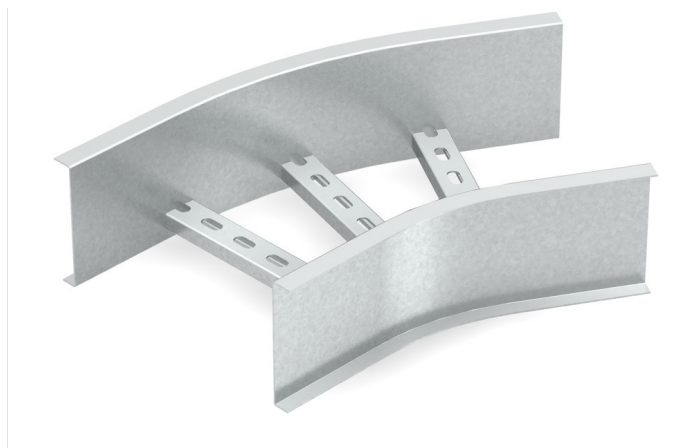

Description

Welded metal accessory for 30° horizontal bends in a Nemaband® ladder installation. Allows the creation of turns or bends in the cable path. Check availability of 900mm radius. Made from steel with GC Protection system.

Advantages

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

Specific use in industrial environments for installations requiring large spans.

Cable tray connection using M8 screws or Nemaband® M8 joint kit

CE certified in compliance with the low voltage directive 2014/35 / EU

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating horizontal 30° flat bends with Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Main technical characteristics							
 GC	 Class 8	 100, 150	 150, 300, 450, 600, 750, 900	30	 1	 Steel with surface coating	 20 J
 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001535					

Product data				
			Ref	kg/u
100	150	300	82002749	2,590
100	300	300	82002750	3,680
100	450	300	82002751	4,540
100	600	300	82002752	5,400
100	750	300	82002753	6,260
100	900	300	82002754	7,120
150	150	300	82002755	3,430
150	300	300	82002756	4,580
150	450	300	82002757	5,510
150	600	300	82002758	6,440
150	750	300	82002759	7,360
150	900	300	82002760	8,290
100	150	600	82002761	3,290
100	300	600	82002762	4,380
100	450	600	82002763	5,240
100	600	600	82002764	6,100
100	750	600	82002765	6,960
100	900	600	82002766	7,820
150	150	600	82002767	4,850
150	300	600	82002768	6,010
150	450	600	82002769	7,160
150	600	600	82002770	8,320
150	750	600	82002771	10,600
150	900	600	82002772	12,000

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum

Nemaband 30° Bend

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

