


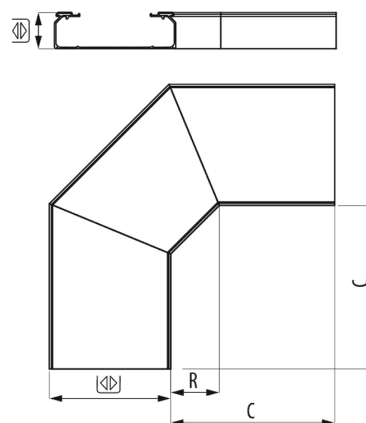

### Description

Insulating accessory for the management of cables with 90° for Metatray® cables trays and trunkings. Of 60 mm height, Width 300 mm. Manufactured in PVC-based Thermoplastic insulating material. Grey RAL 7035 colour for the support, protection and conduction of cables.

### Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Protection grade IP4X or IP44 and Impact Grade 20 J (EN 61537) and IK10 (EN50085)

Insulating material, electrical safety and reduced maintenance costs.

Aenor N mark on product standards EN 61537 and EN 50085. CE compliance with directive 2014/35/EU.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

### Applications

Suitable for the protection of Metatray insulating trays in the routing of cables in electrical and telecommunications installations in different sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that meets the most demanding standards. Its application is also ideal in other different sectors: service, telecommunications, electric mobility through vehicle charging stations, etc.

### Solutions



## Product data

|                                       |               |                                |                         |
|---------------------------------------|---------------|--------------------------------|-------------------------|
| ETIM 10                               | EC002400      | Material                       | PVC                     |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 0,005         | Working temperature range (°C) | -20 / 60 °C             |
| Colour                                | Grey RAL 7035 | Fire resistance                | GRADO UL94: V0          |
| Flange (mm)                           | 60            | UV Behaviour                   | Resistant acc. to UL568 |
| Width (mm)                            | 300           |                                |                         |
| kg/u                                  | 1,991         |                                |                         |
| u                                     | 1             |                                |                         |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



## Product applications

