
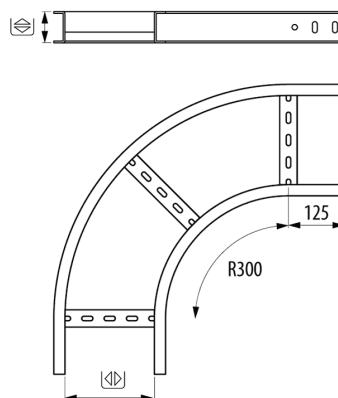


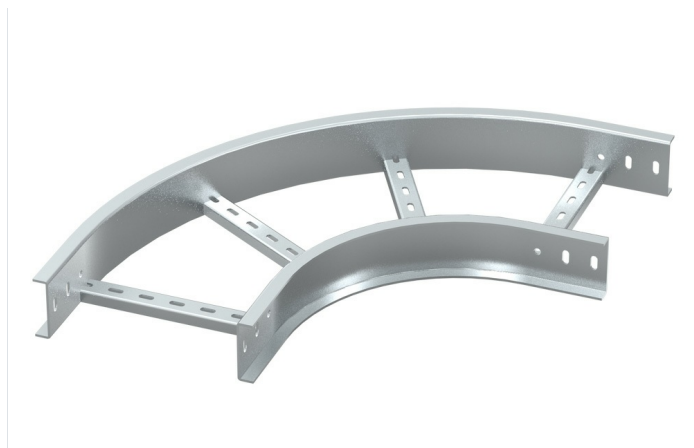

Description

Metal accessory with welded rungs and safety edge for 90° horizontal bends in a ladder installation. Of 70 mm height, Width 100 mm. Assembly using bolts. Bend radius 300mm. Check availability of 600mm radius. Made from steel with GC Protection system.

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in heights 70, 100 120 mm and widths 100 to 600 mm.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

Allows the cable installation to change direction horizontally at 90° angle.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating flat 90° bends with Megaband® REP ladder in electrical and telecommunications installations and supporting large loads in industrial, petrochemical, oil & gas, power plants, mining and cement installations.

Solutions



Product data

ETIM 10	EC001535	kg/u	6,140
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	15,903	u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Impact Strength (J)	20 J
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	70	Fire resistance	A1 No combustible
Width (mm)	100		
R (mm)	300		
Angle	90		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

