
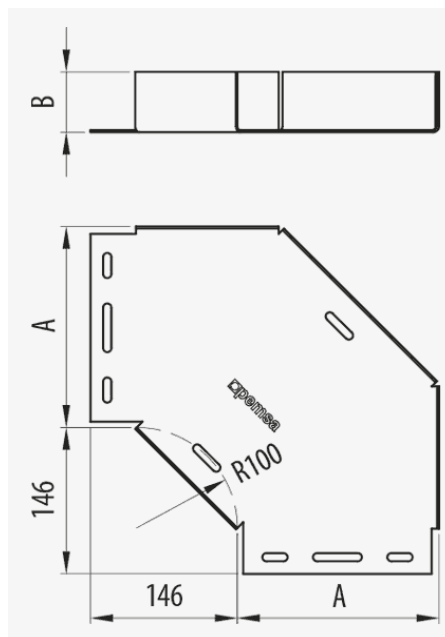


**90° PQ Bend** ( Ref: 70203010 )

1/2

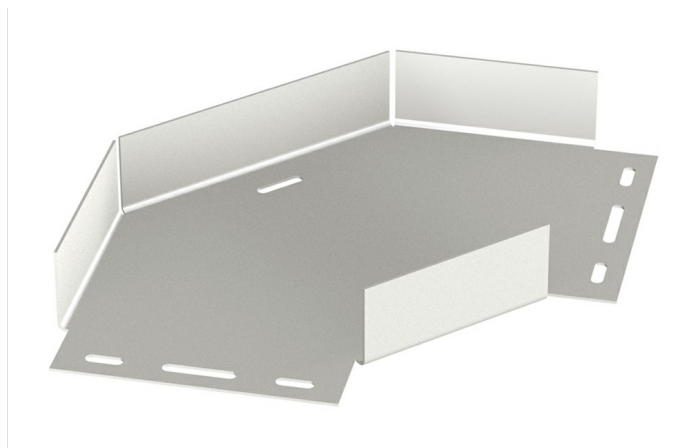

### Description

Metal accessory for the creation of a 90° bend with the Pemsaband® PQU and PQW tray. Of 15 mm height, Width 100 mm, Angle of 90 °. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

### Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

### Applications

Suitable for the creation of 90° bends in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data                          |  |                            |  |
|---------------------------------------|--|----------------------------|--|
| ETIM 10                               |  | EC002400                   |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | 1,785                      |  |
| Protection System                     |  | GC                         |  |
| Finish                                |  | HDG, Hot Dip Galvanised    |  |
| Resistance Class                      |  | Class 8                    |  |
| Flange (mm)                           |  | 15                         |  |
| Width (mm)                            |  | 100                        |  |
| R (mm)                                |  | 100                        |  |
| Angle                                 |  | 90                         |  |
| kg/u                                  |  | 0,689                      |  |
| u                                     |  | 1                          |  |
| Material                              |  | Steel with surface coating |  |
| Impact Strength (J)                   |  | 20 J                       |  |
| Working temperature range (°C)        |  | -50 / 150 °C               |  |
| Fire resistance                       |  | A1 No combustible          |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |