
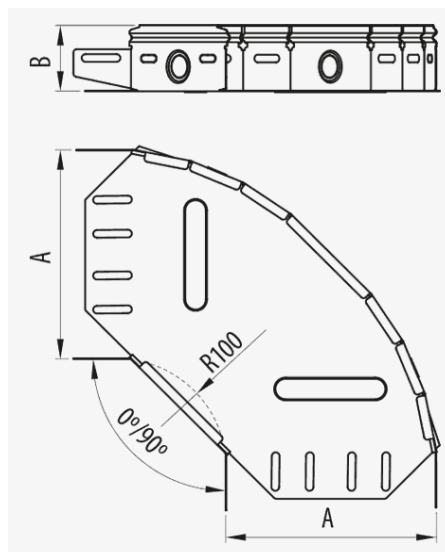


## Adjustable Bend Click ( Ref: 70068230 )

1/5

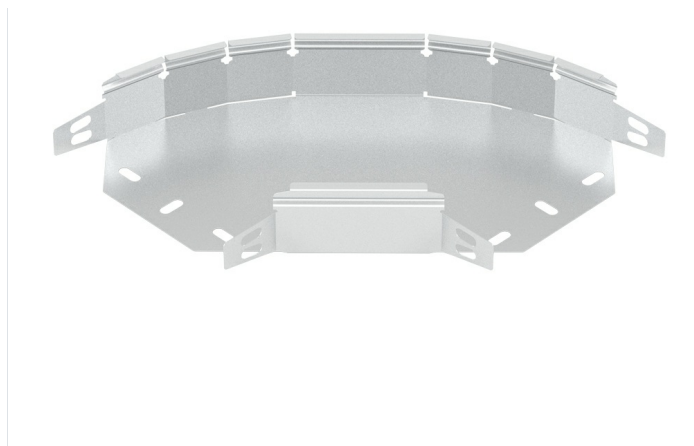

### Description

Adjustable metal bend for different angles with varying degrees in an electrical installation with Pemsaband® and Inducanal® trays. Of 60 mm height, Width 300 mm, With INOX protection system, I316L finish. It allows the creation of angles from 0 to 90°. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

### Advantages

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers.

The design allows for the adjustment of the angle of the bend.

### Applications

Suitable for making bends with different angles. It adapts to the required angles in Pemsaband® One perforated and solid tray systems in the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



# Adjustable Bend Click ( Ref: 70068230 )

2/5

## Product data

|                                       |                           |                                |                            |
|---------------------------------------|---------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC002400                  | kg/u                           | 0,949                      |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 5,041                     | u                              | 1                          |
| Protection System                     | INOX                      | Material                       | Acero inoxidable AISI 316L |
| Finish                                | Stainless Steel AISI 316L | Impact Strength (J)            | 20 J                       |
| Resistance Class                      | Class 9D                  | Working temperature range (°C) | -50 / 150 °C               |
| Flange (mm)                           | 60                        | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 300                       |                                |                            |
| R (mm)                                | 100                       |                                |                            |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic




[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



**Adjustable Bend Click** ( Ref: 70068230 )

**Product applications**

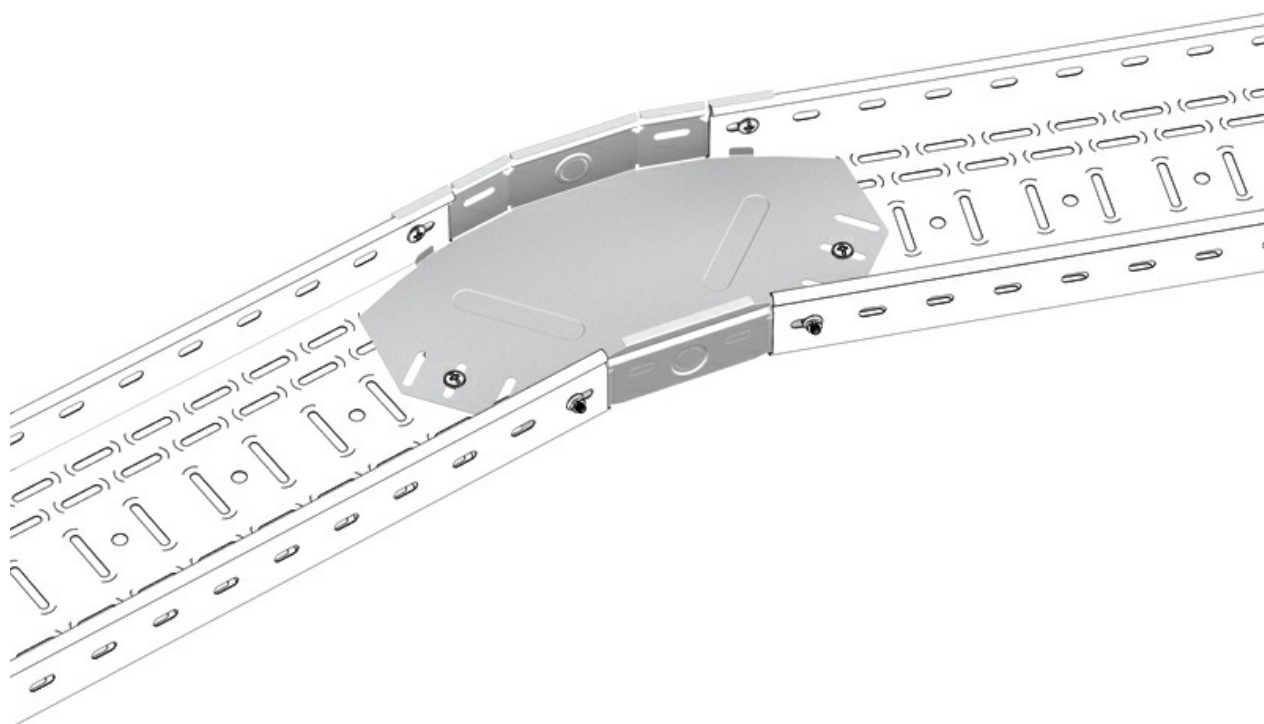

**Adjustable Bend Click** ( Ref: 70068230 )



**Adjustable Bend Click** ( Ref: 70068230 )

