
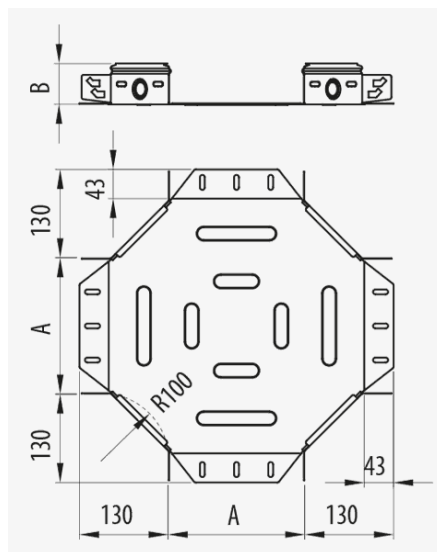


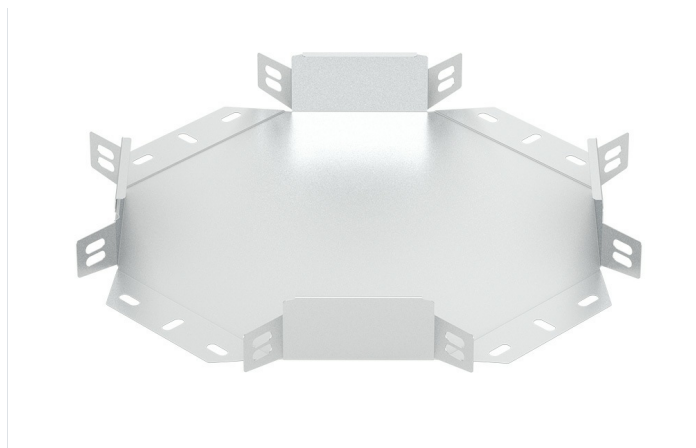

Description

Metal accessory to create a crossover between two lines of Pemsaband® and Inducanal® trays allowing for cables to re-route in three separate ways. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

Advantages

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers. Patented Universal System that has holes compatible with the connection to other sheet metal tray.

Side flanges have the same profile as the straight section of the trays thus forming a continual view of the installation.

It has pre-formed holes in the sides to allow for the connection of fittings and conduits for the exit of cables.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Applications

Used for the creation of a crossover in the Pemsaband® One perforated and solid ranges for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Main technical characteristics

 35, 60, 100	 100, 150, 200, 300, 400, 500, 600	 100	 1	 20 J	 IP44	 -50 °C	 A1 No combustible
ETIM 10	EC001542						

Product data

§	Class	W	D	Ref	kg/u	M
PG	Class 3	35	100	70024110	0,547	Steel with surface coating
PG	Class 3	35	150	70024115	0,798	Steel with surface coating
PG	Class 3	35	200	70024120	1,070	Steel with surface coating
PG	Class 3	35	300	70024130	1,700	Steel with surface coating
PG	Class 3	60	100	70024210	0,680	Steel with surface coating
PG	Class 3	60	150	70024215	0,920	Steel with surface coating
PG	Class 3	60	200	70024220	1,190	Steel with surface coating
PG	Class 3	60	300	70024230	1,820	Steel with surface coating
PG	Class 3	60	400	70024240	2,570	Steel with surface coating
PG	Class 3	60	500	70024250	3,460	Steel with surface coating
PG	Class 3	60	600	70024260	4,450	Steel with surface coating
PG	Class 3	100	100	70024410	0,887	Steel with surface coating
PG	Class 3	100	200	70024420	1,400	Steel with surface coating
PG	Class 3	100	300	70024430	2,020	Steel with surface coating
PG	Class 3	100	400	70024440	2,780	Steel with surface coating
PG	Class 3	100	500	70024450	3,670	Steel with surface coating
PG	Class 3	100	600	70024460	4,660	Steel with surface coating
GC	Class 5	35	100	70034110	0,589	Steel with surface coating
GC	Class 5	35	150	70034115	0,858	Steel with surface coating
GC	Class 5	35	200	70034120	1,150	Steel with surface coating
GC	Class 5	35	300	70034130	1,830	Steel with surface coating
GC	Class 5	60	100	70034210	0,751	Steel with surface coating
GC	Class 5	60	150	70034215	1,020	Steel with surface coating
GC	Class 5	60	200	70034220	1,310	Steel with surface coating
GC	Class 5	60	300	70034230	1,960	Steel with surface coating
GC	Class 5	60	400	70034240	2,760	Steel with surface coating
GC	Class 5	60	500	70034250	3,720	Steel with surface coating
GC	Class 5	60	600	70034260	4,780	Steel with surface coating
GC	Class 5	100	100	70034410	0,953	Steel with surface coating
GC	Class 5	100	200	70034420	1,500	Steel with surface coating
GC	Class 5	100	300	70034430	2,230	Steel with surface coating
GC	Class 5	100	400	70034440	2,990	Steel with surface coating
GC	Class 5	100	500	70034450	3,940	Steel with surface coating
GC	Class 5	100	600	70034460	5,000	Steel with surface coating
INOX	Class 9C	60	100	70054210	0,595	Stainless steel AISI 304
INOX	Class 9C	60	150	70054215	0,805	Stainless steel AISI 304



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Ⓢ	On IEC 61537			Ref	kg/u	Ⓜ
INOX	Class 9C	60	200	70054220	1,040	Stainless steel AISI 304
INOX	Class 9C	60	300	70054230	1,590	Stainless steel AISI 304
INOX	Class 9C	60	400	70054240	2,250	Stainless steel AISI 304
INOX	Class 9C	60	500	70054250	3,030	Stainless steel AISI 304
INOX	Class 9C	60	600	70054260	3,890	Stainless steel AISI 304
INOX	Class 9D	60	100	70064210	0,595	Acero inoxidable AISI 316L
INOX	Class 9D	60	150	70064215	0,805	Acero inoxidable AISI 316L
INOX	Class 9D	60	200	70064220	1,040	Acero inoxidable AISI 316L
INOX	Class 9D	60	300	70064230	1,590	Acero inoxidable AISI 316L
INOX	Class 9D	60	400	70064240	2,250	Acero inoxidable AISI 316L
INOX	Class 9D	60	500	70064250	3,030	Acero inoxidable AISI 316L
INOX	Class 9D	60	600	70064260	3,890	Acero inoxidable AISI 316L

Ⓢ Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Product applications

