


Crossover Pemsaband Vulcan (Ref: 82004871)

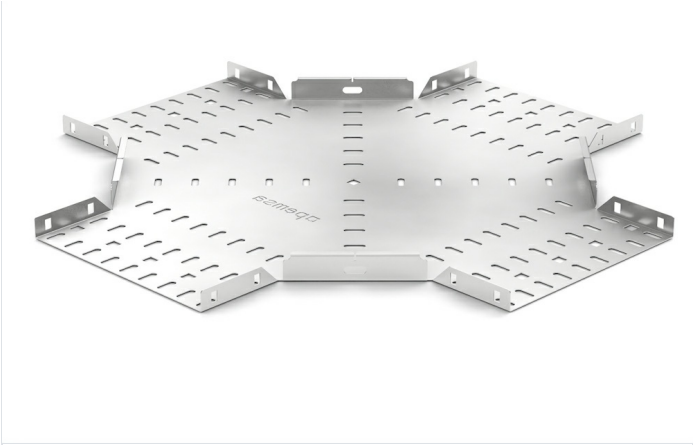

Description

Advantages

Applications

Solutions



Product data			
ETIM 10		u	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		1	
Protection System		Material	
AZ+		Steel with surface coating	
Finish		Impact Strength (J)	
ZM High Resistance Alloy		20 J	
Resistance Class		IP	
Class 8		IP44	
Flange (mm)		Working temperature range (°C)	
25		-50 / 150 °C	
Width (mm)		Fire resistance	
900		A1 No combustible	
kg/u			
22,300			

- Protection System
- CU

- Copper electroplated
- PG

- Pregalvanised
- EZ

- Electrogalvanised
- BC

- Electrogalvanised Bichromate
- BK8

- High Resistance Coating
- GC

- Hot Dip Galvanising
- INOX

- Stainless Steel
- PT

- Polyester Paint
- AL

- Aluminum
- LN

- Brass or Nickel-plated brass

- Insulating materials
- PC+ABS

- Halogen Free Polycarbonate + ABS
- PVC

- Polyvinyl Chloride
- PP

- Halogen Free Polypropylene
- PA6

- Halogen Free Polyamide 6
- PA12

- Halogen Free Polyamide 12
- PU

- Polyurethane
- PE

- Polyethylene
- NBR

- NBR rubber
- PET

- Thermoplastic Polyester
- TPV

- Thermoplastic