


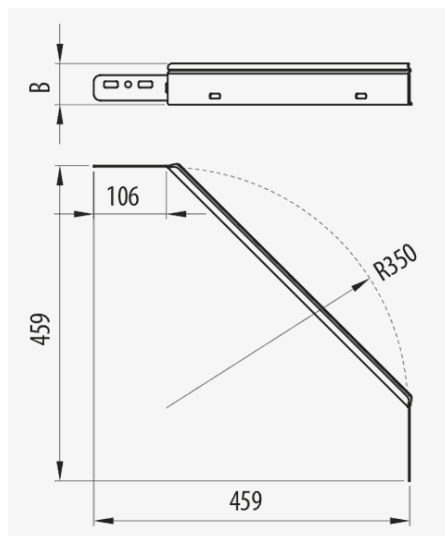

### Description

Set of two metallic pieces, one for each side, with safety edge for the creation of tees and joints in installations of Megaband® ladder. Made of steel, with GC Protection System. Available in different sizes.

### Advantages

Wide product range for all side heights of Megaband®ladder, 60, 85, 100 and 120 mm.

Facilitates the side exit of a cable.

Allows you to configure a side connection with different angles.

### Applications

Suitable for cable management in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector. Designed to withstand very high loads.

### Solutions



Product data

|                                       |                         |                                |                            |
|---------------------------------------|-------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001006                | u                              | 1                          |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 3,16                    | Material                       | Steel with surface coating |
| Protection System                     | GC                      | Working temperature range (°C) | -50 / 150 °C               |
| Finish                                | HDG, Hot Dip Galvanised | Fire resistance                | A1 No combustible          |
| Resistance Class                      | Class 6                 |                                |                            |
| Flange (mm)                           | 60                      |                                |                            |
| kg/u                                  | 1,220                   |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Product applications

