


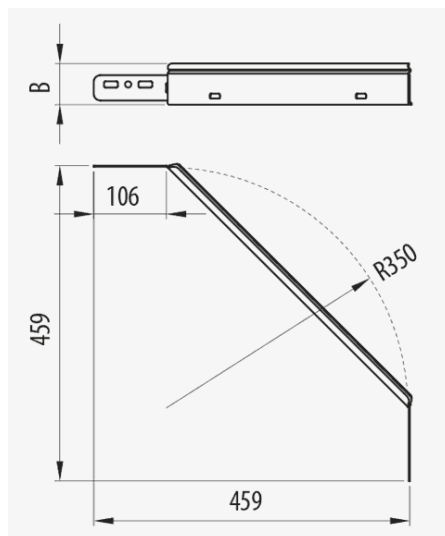

Description

Set of two metallic pieces, one for each side, with safety edge for the creation of tees and joints in installations of Megaband® ladder. Made of steel, with GC Protection System. Available in different sizes.

Advantages

Wide product range for all side heights of Megaband® ladder, 60, 85, 100 and 120 mm.

Facilitates the side exit of a cable.

Allows you to configure a side connection with different angles.

Applications

Suitable for cable management in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector. Designed to withstand very high loads.

Solutions



Product data			
ETIM 10	EC001006	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	5,284	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 6		
Flange (mm)	120		
kg/u	2,040		

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🏠 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

