
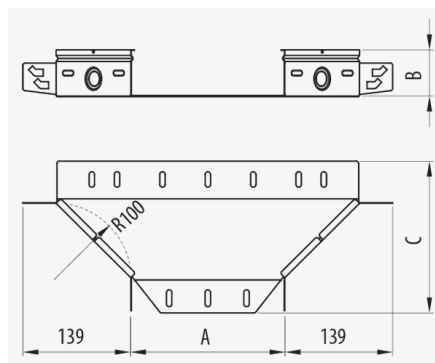


Side Entry Click

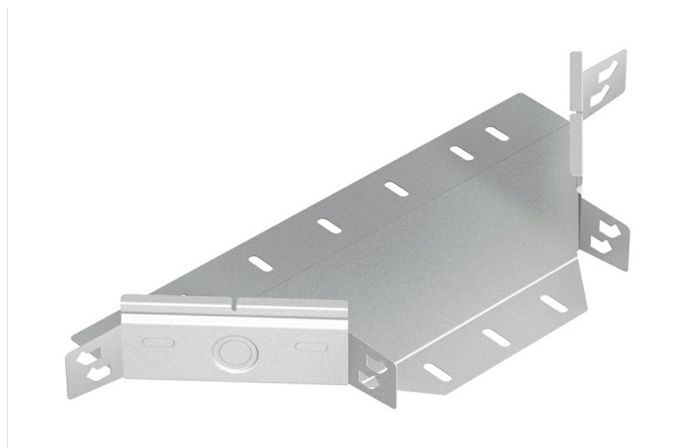

Description

T-shape metal part for Pemsaband® and Inducanal® trays. It enables the construction of a T-shaped junction at any point, although the trays may have different widths. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

Advantages

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers. Patented Universal System that has holes compatible with the connection to other sheet metal tray.

Side flanges have the same profile as the straight section of the trays thus forming a continual view of the installation.

It has pre-formed holes in the sides to allow for the connection of fittings and conduits for the exit of cables.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Applications


It is used to create a junction at any point between Pemsaband® One perforated and solid trays of different widths for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



35, 60, 100	100, 150, 200, 300, 60, 400, 500, 600	100	1	20 J	IP44	-50 / 150 °C
A1 No combustible	ETIM 10 EC001006					

Ⓢ	Ⓜ	Ⓜ	Ⓜ	Ref	kg/ℓ	Ⓜ
PG	Class 3	35	100	70023110	0,305	Steel with surface coating
PG	Class 3	35	150	70023115	0,374	Steel with surface coating
PG	Class 3	35	200	70023120	0,427	Steel with surface coating
PG	Class 3	35	300	70023130	0,547	Steel with surface coating
PG	Class 3	60	60	70023206	0,327	Steel with surface coating
PG	Class 3	60	100	70023210	0,370	Steel with surface coating
PG	Class 3	60	150	70023215	0,435	Steel with surface coating
PG	Class 3	60	200	70023220	0,490	Steel with surface coating
PG	Class 3	60	300	70023230	0,610	Steel with surface coating
PG	Class 3	60	400	70023240	0,728	Steel with surface coating
PG	Class 3	60	500	70023250	0,812	Steel with surface coating
PG	Class 3	60	600	70023260	0,923	Steel with surface coating
PG	Class 3	100	100	70023410	0,482	Steel with surface coating
PG	Class 3	100	200	70023420	0,602	Steel with surface coating
PG	Class 3	100	300	70023430	0,721	Steel with surface coating
PG	Class 3	100	400	70023440	0,839	Steel with surface coating
PG	Class 3	100	500	70023450	0,923	Steel with surface coating
PG	Class 3	100	600	70023460	1,040	Steel with surface coating
GC	Class 5	35	100	70033110	0,328	Steel with surface coating
GC	Class 5	35	150	70033115	0,402	Steel with surface coating
GC	Class 5	35	200	70033120	0,460	Steel with surface coating
GC	Class 5	35	300	70033130	0,589	Steel with surface coating
GC	Class 5	60	100	70033210	0,398	Steel with surface coating
GC	Class 5	60	150	70033215	0,468	Steel with surface coating
GC	Class 5	60	200	70033220	0,527	Steel with surface coating
GC	Class 5	60	300	70033230	0,656	Steel with surface coating
GC	Class 5	60	400	70033240	0,782	Steel with surface coating
GC	Class 5	60	500	70033250	0,873	Steel with surface coating
GC	Class 5	60	600	70033260	0,993	Steel with surface coating
GC	Class 5	100	100	70033410	0,518	Steel with surface coating
GC	Class 5	100	200	70033420	0,647	Steel with surface coating
GC	Class 5	100	300	70033430	0,776	Steel with surface coating
GC	Class 5	100	400	70033440	0,902	Steel with surface coating
GC	Class 5	100	500	70033450	0,993	Steel with surface coating
GC	Class 5	100	600	70033460	1,120	Steel with surface coating



Any information included in this document is property of Pemsas®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsas®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsas, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsas Cable Management, S.A."



⑤	Des 61537	⊞	⊞	Ref	kg/u	Ⓜ
INOX	Class 9C	60	100	70053210	0,324	Stainless steel AISI 304
INOX	Class 9C	60	150	70053215	0,381	Stainless steel AISI 304
INOX	Class 9C	60	200	70053220	0,429	Stainless steel AISI 304
INOX	Class 9C	60	300	70053230	0,534	Stainless steel AISI 304
INOX	Class 9C	60	400	70053240	0,637	Stainless steel AISI 304
INOX	Class 9C	60	500	70053250	0,711	Stainless steel AISI 304
INOX	Class 9C	60	600	70053260	0,808	Stainless steel AISI 304
INOX	Class 9D	60	100	70063210	0,324	Acero inoxidable AISI 316L
INOX	Class 9D	60	150	70063215	0,381	Acero inoxidable AISI 316L
INOX	Class 9D	60	200	70063220	0,429	Acero inoxidable AISI 316L
INOX	Class 9D	60	300	70063230	0,534	Acero inoxidable AISI 316L
INOX	Class 9D	60	400	70063240	0,637	Acero inoxidable AISI 316L
INOX	Class 9D	60	500	70063250	0,711	Acero inoxidable AISI 316L
INOX	Class 9D	60	600	70063260	0,808	Acero inoxidable AISI 316L
GC	Class 5	60	60	82003581	0,352	Steel with surface coating
AZ+	Class 8	60	60	82003798	0,327	Steel with surface coating
AZ+	Class 8	60	100	82003799	0,370	Steel with surface coating
AZ+	Class 8	60	150	82003800	0,435	Steel with surface coating
AZ+	Class 8	60	200	82003801	0,490	Steel with surface coating
AZ+	Class 8	60	300	82003802	0,610	Steel with surface coating
AZ+	Class 8	60	400	82003803	0,728	Steel with surface coating
AZ+	Class 8	60	500	82003804	0,812	Steel with surface coating
AZ+	Class 8	60	600	82003805	0,923	Steel with surface coating
AZ+	Class 8	100	100	82004279	0,482	Steel with surface coating
AZ+	Class 8	100	200	82004280	0,602	Steel with surface coating
AZ+	Class 8	100	300	82004281	0,721	Steel with surface coating
AZ+	Class 8	100	400	82004282	0,839	Steel with surface coating
AZ+	Class 8	100	500	82004283	0,923	Steel with surface coating
AZ+	Class 8	100	600	82004284	1,040	Steel with surface coating
PG	Class 3	35	60	82004408	0,270	Steel with surface coating
AZ+	Class 8	35	60	82004409	0,270	Steel with surface coating
AZ+	Class 8	35	100	82004410	0,310	Steel with surface coating
AZ+	Class 8	35	150	82004411	0,370	Steel with surface coating
AZ+	Class 8	35	200	82004412	0,430	Steel with surface coating
AZ+	Class 8	35	300	82004413	0,550	Steel with surface coating

⑤ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electroalvanised

BC - Electroalvanised Bichromate

BK8 - High Resistance Coating



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Product applications





