


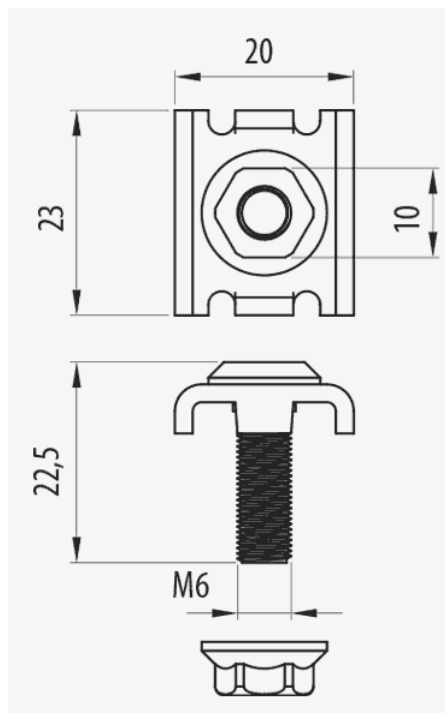

Description

Metal fixing for the attachment of supports or other accessories to Rejiband wire mesh trays. With BK8 protection system, BK8-ZNI finish. It consists of a 20 mm wide plate with a captive M6 screw and nut and is suitable for connection to trays of 35, 60 and 100 mm in height and all widths. Made of steel and available in various Protection Systems.

Advantages

Precise adjustment and maximum resistance.

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

Large saving in time and cost of the installation.

Quick installation thanks to the captive screw.

E90 fire resistance (90 minutes, 1000°C) according to DIN 4102-12.

Applications

Suitable for all Rejiband tray connections and accessories. It facilitates the installation of Rejiband wire mesh trays in cable management installations.

Solutions



Product data			
ETIM 10		EC001005	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	0,019
Protection System		BK8	
Finish		Zinc Nickel black	
Resistance Class		Class 8	
M/PG		M 6	
G (mm)		20	
		kg/u	0,019
		u	50
		Material	Steel with surface coating
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	E90 (90 min. 1000°C)

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

