
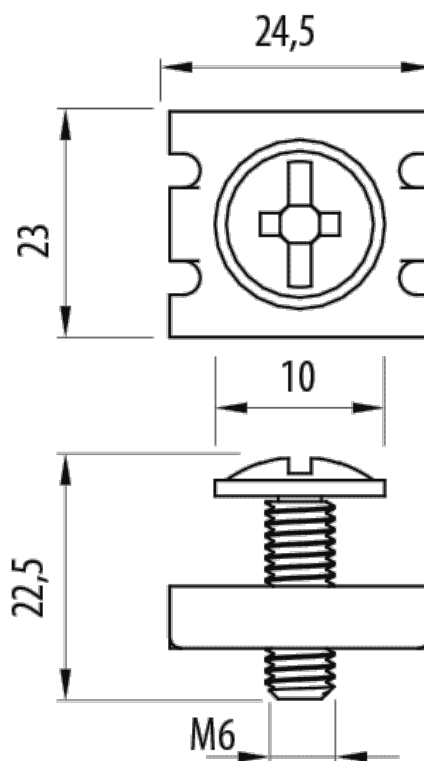


Part Clamp 60x60-2 (Ref: 64060058)

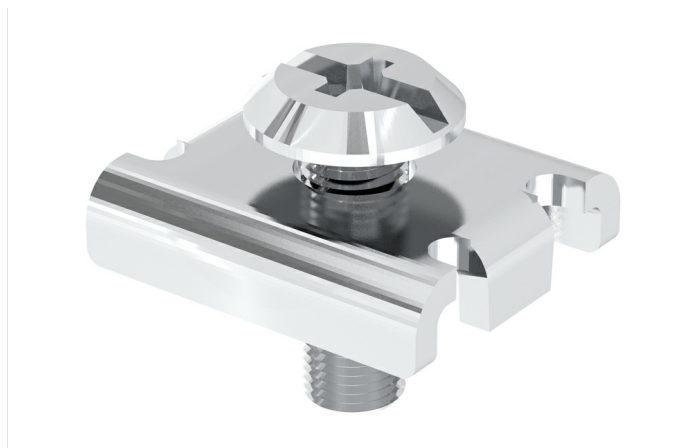

Description

M6x18 fixing kit for connecting the Rejiband® 60x60 mm grid tray with double wire on the base. With INOX protection system, I316L finish. Formed by two pieces of a Phillips head bolt and plate that fits over the rods. Manufactured in Steel and available in various Protection Systems.

Advantages

Wide range of protection systems: EZ, BC, GC, BK8 and stainless steel AISI 304 and AISI 316L.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

The screw is separate to the plate allowing direct manipulation with a tool and easy installation.

Easy connection on 41x21 mm and 41x41 mm channels by using an additional M6 channel nut.

The shape of the plate fits precisely on the double rod at the base of the tray. Maximum resistance.

Applications

Suitable for the connection of Rejiband® trays of 60x60 mm with double rod in the base directly on to a base or facing or directly to 41x21 mm or 41x41 mm channel for the routing, transport and distribution of cables in electrical installations and / or telecommunications in civil works, tunnels, car parks, public buildings, shopping centers, data processing centers, large infrastructures, airports, subway lines, trains, tertiary sector and industrial applications.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC001005	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	25
Protection System		INOX	
Finish		Stainless Steel AISI 316L	
Resistance Class		Class 9D	
M/PG		M 6	
G (mm)		18	
		kg/u	0,014
		Material	Acero inoxidable AISI 316L
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	A1 No combustible

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

