


Cover fixing PQU

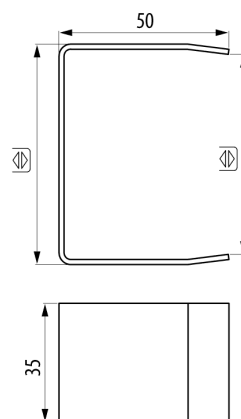

Description

Lid fixing for use on the Pemsaband® PQU tray. It provides more security to the system during wind or inclement weather. Made from AISI 304 stainless steel.

Advantages

Allows greater protection of wiring in aggressive environments.

Fixing element to give a greater closure to the Pemsaband PQU AL cable tray

CEPSA product approval. Designed according to ESP-2208-5 specification.

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

The 60mm high reference is also suitable for installation on the Pemsaband® and Inducanal® tray system.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Main technical characteristics

 INOX	 Class 9C	 30, 60, 50	 4	 Stainless steel AISI 304	 -50 / 150 °C	 A1 No combustible
ETIM 10	EC001002					

Product data

	Ref	kg/u
30	82002291	0,055
60	82002292	0,067
50	82002293	0,063

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Cover fixing PQU

3/3

Product applications

