
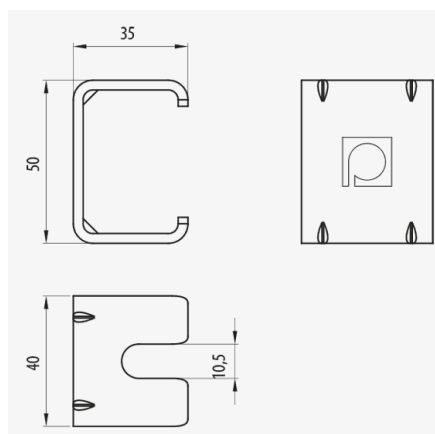


Ceiling Rod Bracket

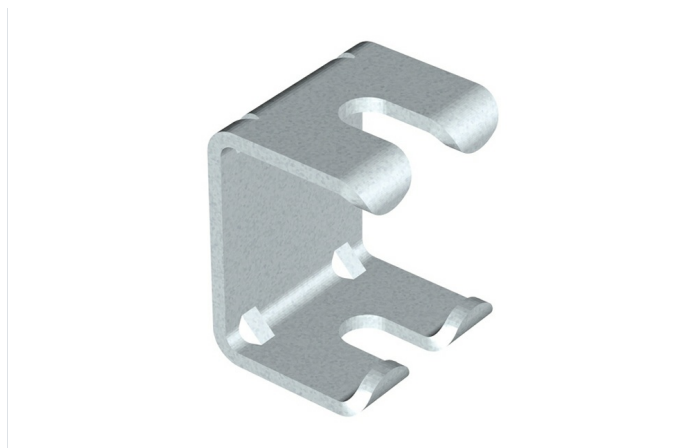

Description

Metal support for the ceiling mounting of Rejiband® wire mesh trays and Pemsaband® sheet trays by means of a M8 or M10 threaded rod in electrical or telecommunications indoor installations. Made of steel with PG Protection System.

Advantages

Connection with M8 or M10 threaded rod using hexagonal nuts.

Suitable for the support of all ranges of cable trays.

Suitable for ceiling installations with confined spaces, thanks to its reduced dimensions.

CE conformity to directive 2014/35 / EU.

PG protection system, according to BS-EN-10142, suitable for indoor installations in industrial environments. Corrosion resistance class 3.

Applications

Suitable for supporting medium loads of cable trays to the ceiling by means of a rod for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications.

Solutions



Ceiling Rod Bracket

Main technical characteristics

ETIM 10
EC000896

Product data

		REF	kg/u					
PG	Class 3	67030060	0,098	10	Steel with surface coating	275	-50 / 150 °C	A1 No combustibile

 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester


TPV - Thermoplastic



Ceiling Rod Bracket

3/4

Product applications

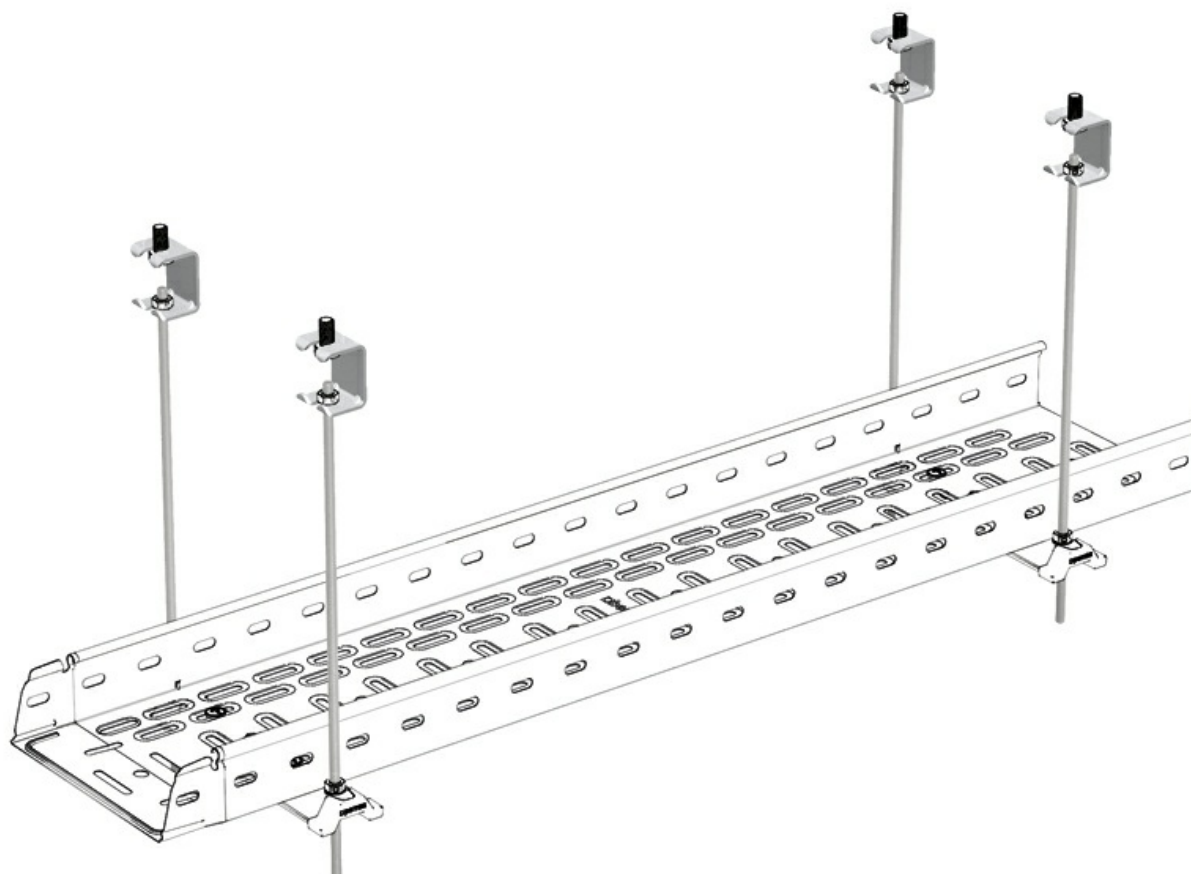

Ceiling Rod Bracket

