
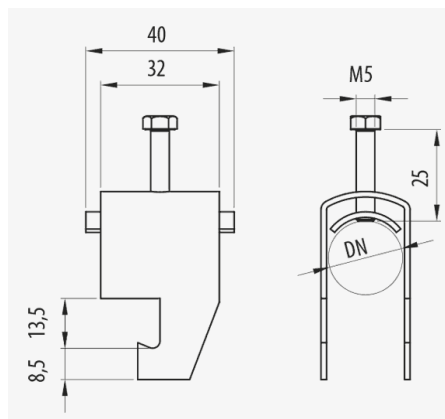


# **Metal Cable Clamp** ( Ref: 93930115 )

1/3

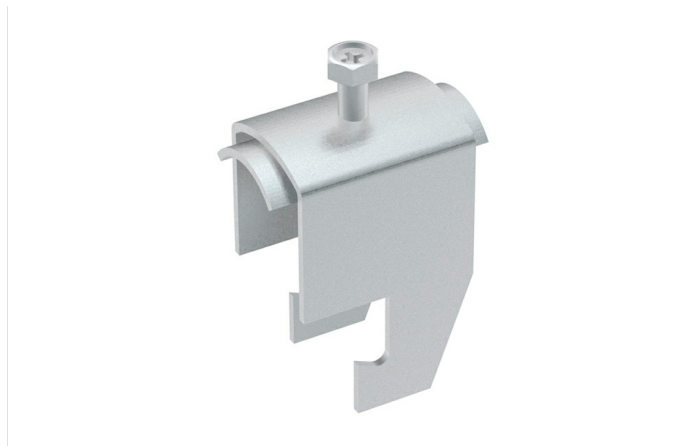

## Description

GC Protection System steel clamp in various sizes, suitable for fixing cables to the rungs of the Megaband® ladder. Maximum diameter DN15 mm. Assembly by click system of quick connection without screws. Available for different cable diameters.

## Advantages

Especially suitable for vertical installations.

Electrical continuity guaranteed according to standard IEC61537.

Thanks to its shape, and the curved metal plate, it prevents any damage to the cables.

## Applications

Used to secure the cables to the rungs of Megaband® ladder, in the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector. Used especially in vertical installations.

## Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

|                                       |                         |                                |                            |
|---------------------------------------|-------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC000454                | u                              | 1                          |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 0,109                   | Material                       | Steel with surface coating |
| Protection System                     | GC                      | Working temperature range (°C) | -50 / 150 °C               |
| Finish                                | HDG, Hot Dip Galvanised | Fire resistance                | A1 No combustible          |
| Resistance Class                      | Class 6                 |                                |                            |
| DN                                    | NW15                    |                                |                            |
| kg/u                                  | 0,042                   |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

**Metal Cable Clamp** ( Ref: 93930115 )

**Product applications**

