
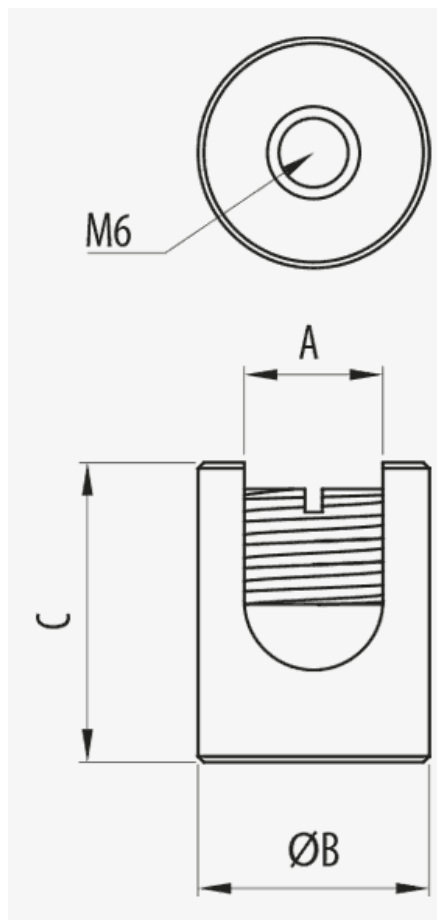


Bonding Connector

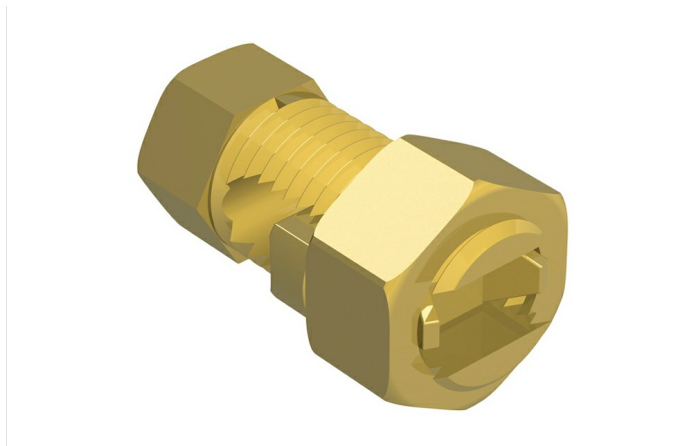

Description

Advantages

Applications

Solutions



Main technical characteristics

 LTN	 20	 Brass	 -50 / 150 °C	ETIM 10 EC002935
---	--	---	--	---------------------

Product data

		A _(mm)	B _(mm)	Ref	kg/u
16	4.5 / 8	16	50	68000034	0,024
50	8 / 11.5	50	110	68000035	0,043

 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic




Bonding Connector


Product applications

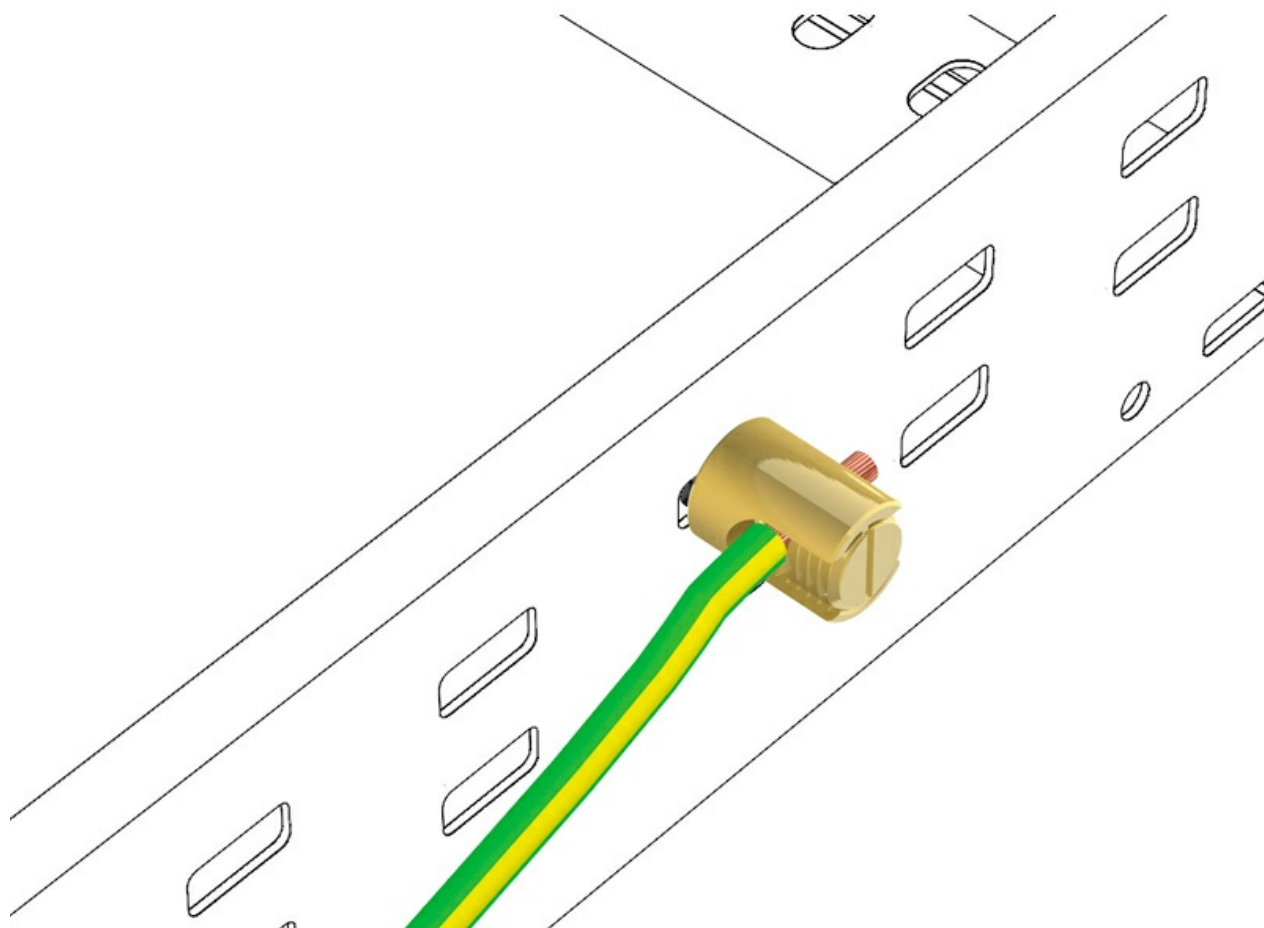

Bonding Connector

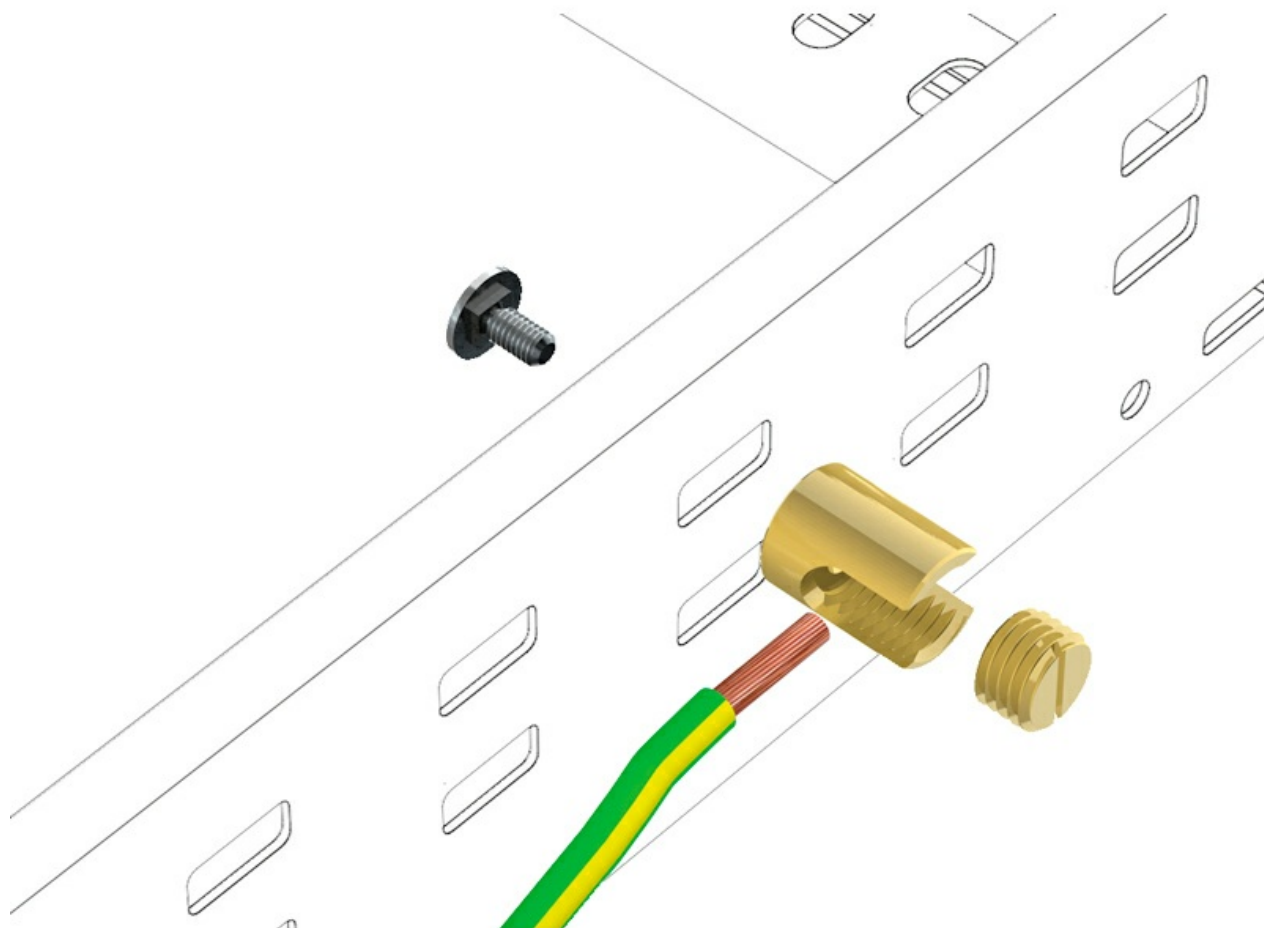

Bonding Connector

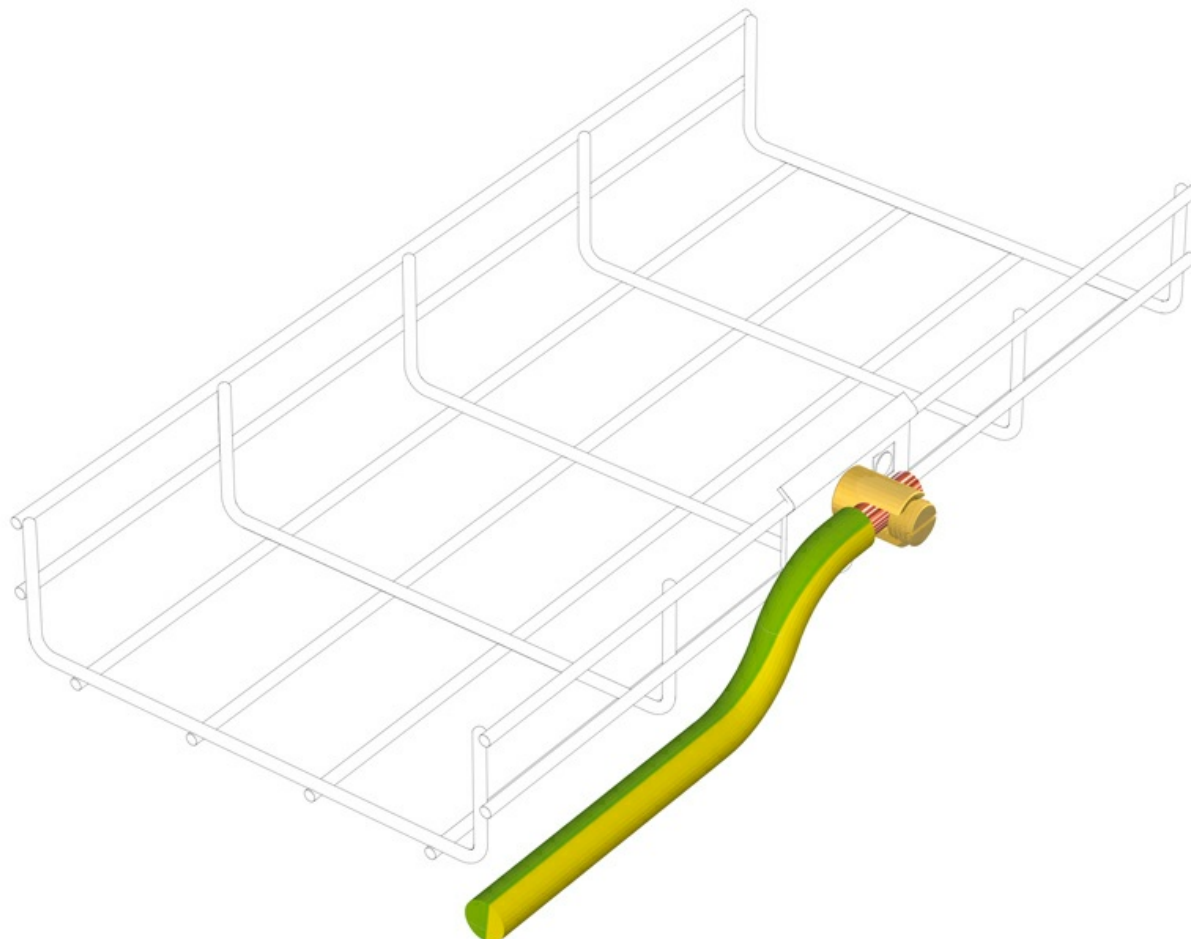

Bonding Connector

