


Click Divider

1/7

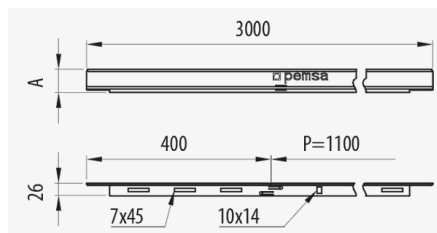

Description

Advantages

Applications

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 35, 60, 85	 3	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001000
---	---	--	---	---------------------

Product data

				kg/u		
PG	Class 3	35	67020610	0,207	60	Steel with surface coating
PG	Class 3	60	67020611	0,309	48	Steel with surface coating
PG	Class 3	85	67020612	0,439	36	Steel with surface coating
INOX	Class 9C	35	67050610	0,204	60	Stainless steel AISI 304
INOX	Class 9C	60	67050611	0,302	48	Stainless steel AISI 304
INOX	Class 9C	85	67050612	0,428	36	Stainless steel AISI 304
AZ+	Class 8	60	81000312	0,386	48	Steel with surface coating

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Product applications

