
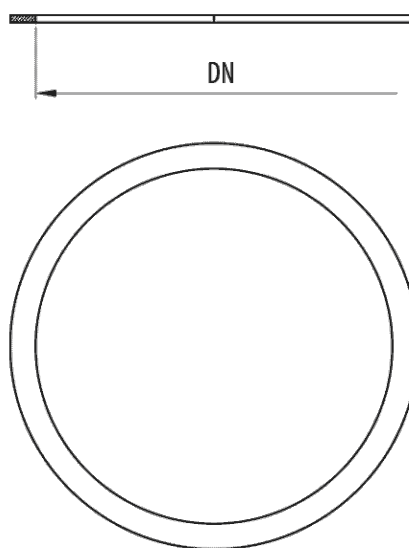


Fibre Washer I

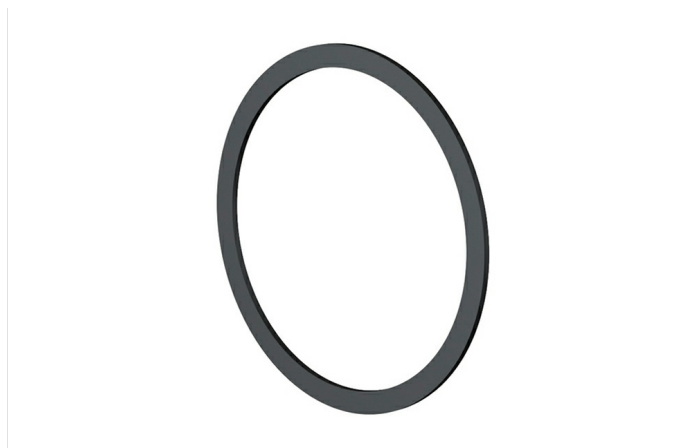

Description

Type I fibre washer in black nitrile RAL 9005 with an IP65 degree of protection available in NW70 and NW95 diameters for mounting in the surface of the fixing ring of the Macroflex® range of fittings.

Advantages

Mounting inside fittings of the Macroflex® range.

Protection index EN 60529: IP65.

Working temperature: -25°C to + 105°C.

Manufactured in NBR elastomer.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for fixing large diameter Pemsaflex® and Macroflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

Solutions



Fibre Washer I

Main technical characteristics

Colour	Black RAL 9005	DN	NW70, NW95	kg/u	0,001		10		NBR		IP65		-25 / 90 °C		Flame retardant
ETIM	10														
EC001181															

Product data

DN	Ref
NW70	33090070
NW95	33090095

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

