
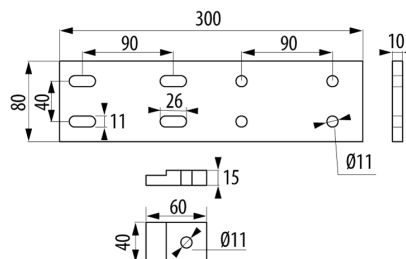


Megaband CPS Straight Joint Kit (KUR) (

1/2

Ref: 82002346)

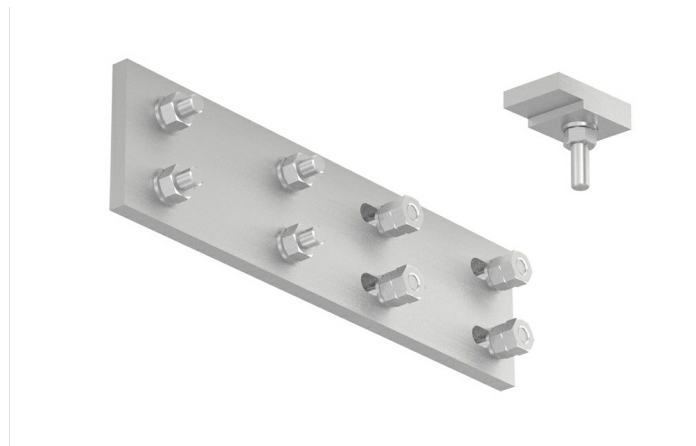

Description

Straight joint kit for connecting ladder and accessories. Consists of 1 Joint, 1 Fixing Support, 8 DIN933 M10x30 Bolts, 1 DIN933 M10x50 Bolt, 13 DIN934 M10 Nuts, 9 DIN125 M10 Washers, 4 DIN127 Spring Washers. Suitable for all sizes. With AL protection system

Advantages

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Made of Aluminum alloy 6063T6. Excellent corrosion resistance.

Electrical continuity guaranteed according to standard IEC61537.

Allows the creation of articulated risers with variable angle for Megaband® CPS.

A versatile piece for using in any coupler element.

Applications

Suitable for cable conduit installations in the Oil & Gas and Petrochemical Industry, Offshore Platforms, Ports and Maritime Applications in general. Industrial projects in aggressive environments and with high corrosion on the coast and seashore, Power Plants and Renewable Energy.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		AL	
Finish		6063T6 Aluminium	
Flange (mm)		100	
kg/u		1,105	
u		1	
Material		Aluminum	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic