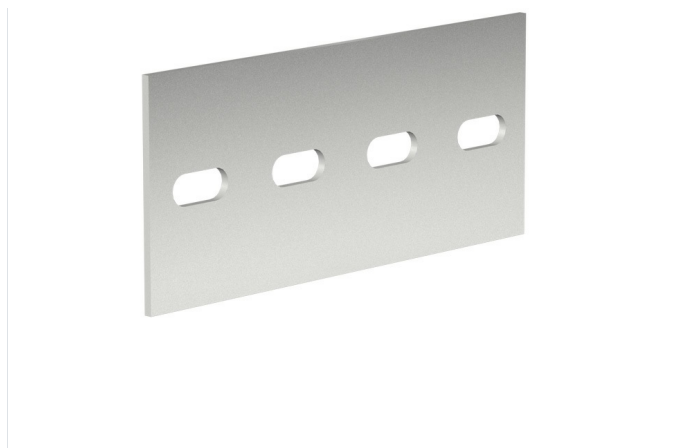


Description

Joint kit for connecting Megaband® REP ladder and accessories. Of 100 mm height. Comprised of M8x20 hexagonal head bolt and M8 metal nut. Suitable for all ladder widths. Made from steel with GC Protection system.

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

It allows the connection of Megaband® ladder lengths and the fixing of joints for cut sections.

A versatile piece for using in any coupler element.

GC Protection System, Class 8 according to IEC 61537.

Applications

Suitable for fixing joints, supports and channel structures for Megaband® REP ladder installations in electrical and telecommunications installations and supporting heavy loads in industrial, petrochemical, oil & gas, power plants, mining and cement installations.

Solutions



Product data			
ETIM 10	EC002413	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,234	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 8		
Flange (mm)	100		
kg/u	0,477		

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🧊 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic