


Joint Kit

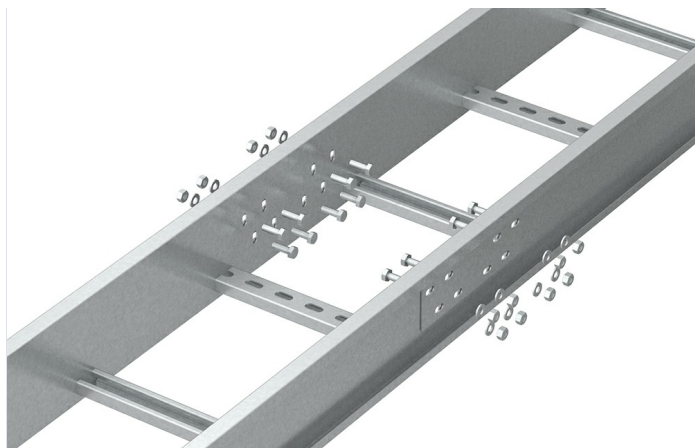

Description

Joint kit for connecting ladder and accessories. Consists of a M8x20 hexagonal head bolt and M8 metal nut for Nemaband® ladder installations, maintaining electrical continuity according to IEC 61537. Made from steel with GC Protection system.

Advantages

It allows the connection of Nemaband® cable ladder straight and cut sections.

A versatile piece for using in any coupler element.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

GC Protection System, Class 8 according to IEC 61537.

Applications

Suitable for fixing joints, supports and channel structures for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Main technical characteristics

ETIM 10

EC003861

Product data

				Ref	kg/u				
GC	Class 8	M 8	20	67030094	0,018	100	Steel with surface coating	-50 / 150 °C	A1 No combustible

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic