


Insert-A

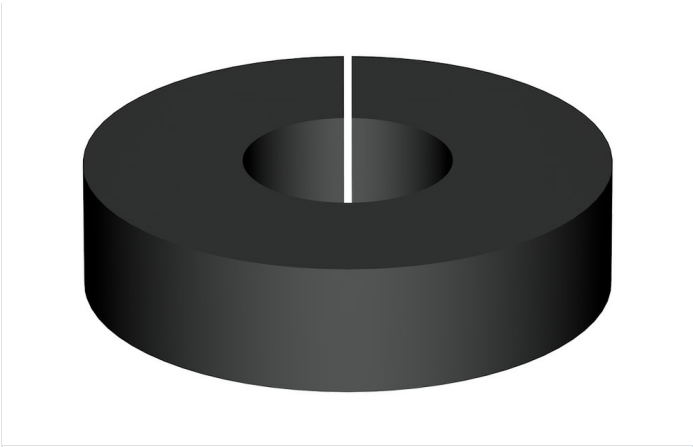

Description

Advantages

Applications

Solutions



Main technical characteristics

COLOUR	Black RAL 9005	DN	NW 5	PG	PG13, PG16, PG21	1	M	NBR	IP	IP65	°C	-40 / 100 °C
LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA					ETIM 10 EC002318							

Product data

PG	DN	Ref	kg/u	Q
PG13	16	40030913	0,002	50
PG16	18	40030916	0,002	25
PG21	22	40030921	0,004	25

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic