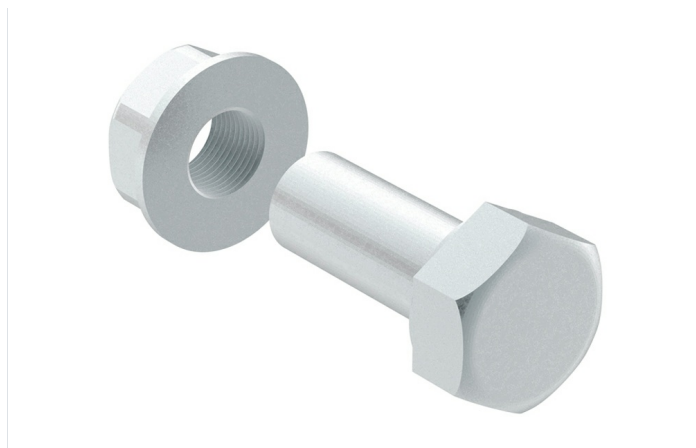


Description

Coupling kit for connecting trays and accessories, consisting of M8x20 hexagonal head bolt and M8 metal nut for Megaband® ladder installations, maintaining electrical continuity according to IEC 61537. M 8, M 8, With GC protection system. Suitable for all ladder sizes. Made of steel, and available in various Protection Systems.

Advantages

Suitable for all sizes of cable tray.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Electrical continuity guaranteed according to standard IEC61537.

It allows the connection of Megaband® ladder lengths and the fixing of joints for cut sections.

Very versatile piece for use in any joint along with a M8 hexagonal nut.

Applications

Suitable for the fixing of joints, supports and channel structures for installations of Megaband® ladder in the management of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

Solutions



Product data

ETIM 10	EC003861	kg/u	0,018
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	100
Protection System	GC	Material	Steel with surface coating
Finish	Zinc Nickel	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 8	Fire resistance	A1 No combustible
M/PG	M 8		
G (mm)	20		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Product applications

□ □ □ □ □ □ □ □