


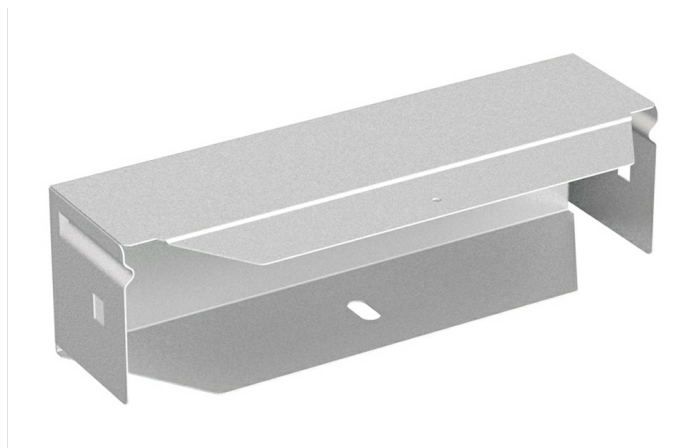

Description

Metal cover used as an end closure for the Megaband® ladder system. Of 120 mm height, Width 500 mm, With GC protection system, HDG finish. Quick connection assembly using the click system, without joints. Made of steel, in various sizes and Protection Systems.

Advantages

Safer professional finish.

Available in various sizes.

Its unique design allows the closure and protection of Megaband ladder.

Applications

It is used as a closure on the end of the Megaband® ladder system for the protection of the installation. Applicable in the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



Product data			
ETIM 10		EC001574	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		2,259	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 5	
Flange (mm)		120	
Width (mm)		500	
kg/u		0,872	
u		1	
Material		Steel with surface coating	
IP		IP44	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications



