


**Pendant Omega SPLUS** ( Ref: 62031504 )

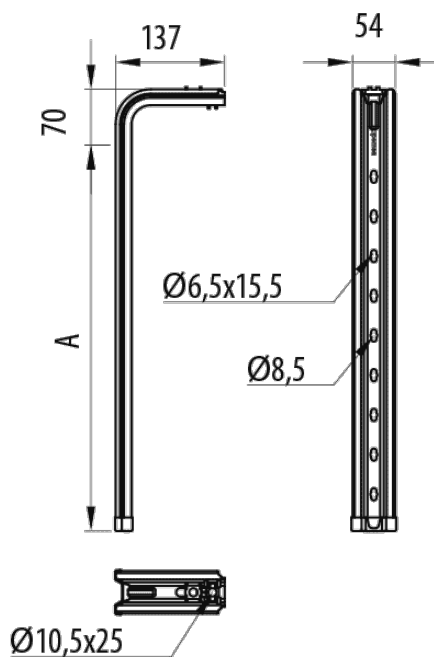

### Description

Omega profile pendulum 500 mm with safety plugs for ceiling mounting of Rejiband® trays with click system and Pemsaband® trays with fixings. Ceiling fixing system that allows you to configure different structures individually or with the help of omega SPLUS support. Made of steel.

### Advantages

### Applications

### Solutions



RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                          |                                       |                            |
|----------------------------------------------|--------------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC000022                 | <b>Material</b>                       | Steel with surface coating |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 2,434                    | <b>F (kg)</b>                         | 300                        |
| <b>Protection System</b>                     | AZ+                      | <b>Mf1 (Kg·m)</b>                     | 8                          |
| <b>Finish</b>                                | ZM High Resistance Alloy | <b>Mf2 (Kg·m)</b>                     | 7                          |
| <b>Resistance Class</b>                      | Class 8                  | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Width (mm)</b>                            | 500                      | <b>Fire resistance</b>                | E90 (90 min. 1000°C)       |
| <b>kg/u</b>                                  | 0,754                    |                                       |                            |
| <b>u</b>                                     | 5                        |                                       |                            |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene


**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Load diagrams
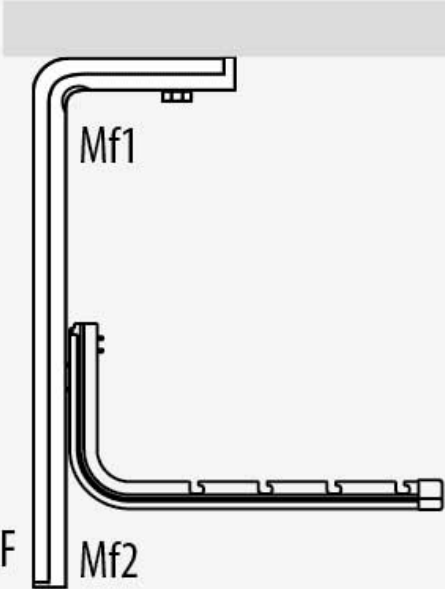
| CTA (kg)                                                                          |  | F<br>kg | Mf1<br>kg.m | Mf2<br>kg.m |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|-------------|-------------|
| PG                                                                                |                                                                                   |         |             |             |
|  | 300                                                                               | 200     | 9           | 7           |
|                                                                                   | 400                                                                               | 200     | 7           | 6           |
|                                                                                   | 500                                                                               | 300     | 8           | 7           |
|                                                                                   | 600                                                                               | 350     | 10          | 9           |
|                                                                                   | GC                                                                                |         |             |             |
|                                                                                   | 300                                                                               | 165     | 8           | 6           |
|                                                                                   | 400                                                                               | 180     | 7           | 6           |
|                                                                                   | 500                                                                               | 270     | 11          | 10          |
|                                                                                   | 600                                                                               | 280     | 11          | 10          |

Product applications



