


Pendant Omega SPLUS (Ref: 62031604)

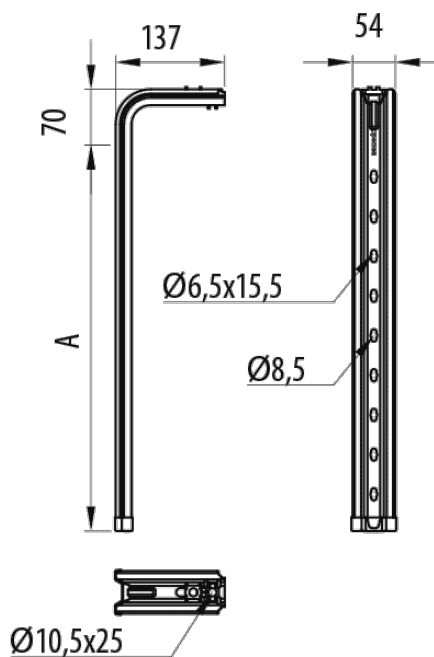

Description

Omega profile pendulum 600 mm with safety plugs for ceiling mounting of Rejiband® trays with click system and Pemsaband® trays with fixings. Ceiling fixing system that allows you to configure different structures individually or with the help of omega SPLUS support. Made of steel.

Advantages

Applications

Solutions



RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC000022	Material	Steel with surface coating
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	2,802	F (kg)	350
Protection System	AZ+	Mf1 (Kg·m)	10
Finish	ZM High Resistance Alloy	Mf2 (Kg·m)	9
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Width (mm)	600	Fire resistance	E90 (90 min. 1000°C)
kg/u	0,867		
u	5		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene


NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Load diagrams

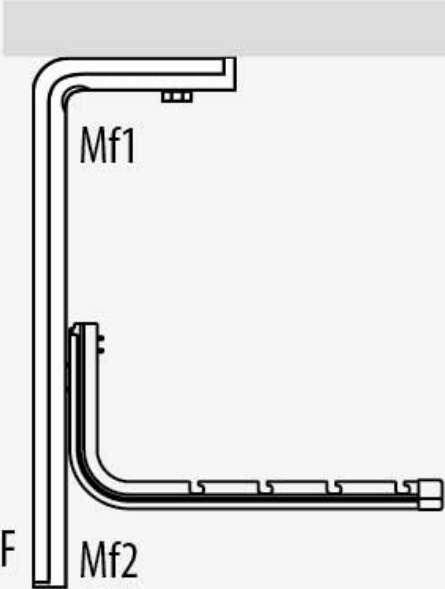CTA (kg)		F kg	Mf1 kg.m	Mf2 kg.m
PG				
	300	200	9	7
	400	200	7	6
	500	300	8	7
	600	350	10	9
	GC			
	300	165	8	6
	400	180	7	6
	500	270	11	10
	600	280	11	10

Product applications

