


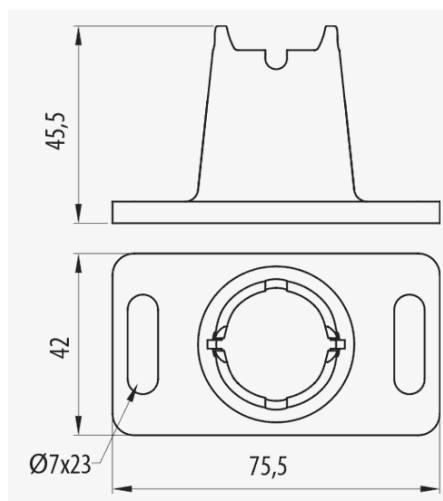

### Description

Rejiband® accessory intended for the support of the Rejiband® wire mesh tray in installations on technical floors with a height of 40 mm. Press fit thanks to the Click system that allows a quick installation on Rejiband®. Made of red polystyrene.

### Advantages

Installation in raised floors.

High safety material, flammability V0 according to UL94 for black references.

It allows for raising the height from 40 mm up to 73 mm by stacking a maximum of two supports.

It can be fixed with adhesive (ref. 68000066) or screwed to the floor.

Fast mount Click system.

### Applications

Suitable for the installation of trays in raised floors and used for the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

### Solutions



RENEWABLE ENERGIES



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |              |                                       |                                          |
|----------------------------------------------|--------------|---------------------------------------|------------------------------------------|
| <b>ETIM 10</b>                               | EC000022     | <b>SWL (kg)</b>                       | 40                                       |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |              | <b>Working temperature range (°C)</b> | -15 / 90 °C                              |
| <b>Colour</b>                                | Red RAL 3000 | <b>Fire resistance</b>                | NO PROPAGADOR DE LA LLAMA,GRADO UL94: V2 |
| <b>kg/u</b>                                  | 0,026        |                                       |                                          |
| <b>u</b>                                     | 100          |                                       |                                          |
| <b>Material</b>                              | Plastic      |                                       |                                          |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



## Product applications

