
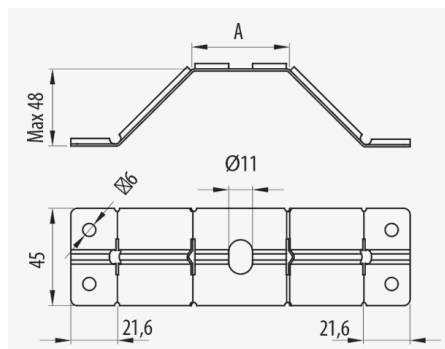


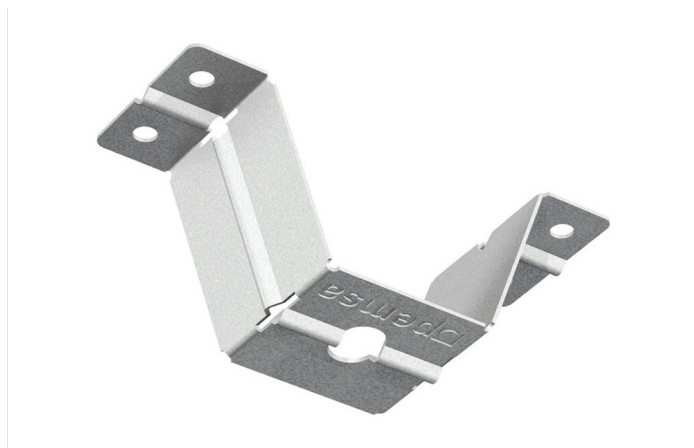

### Description

Metal support for the installation of the Rejiband® wire mesh tray to the floor. Width 90 mm, With PG protection system. Available in two widths of 45 and 90 mm wide and in various Protection Systems. Attachment to the tray is by using the Rejiband® fastening.

### Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Facilitates the installation of trays on the floor.

Mounting and fastening by using screws.

### Applications

Suitable for the installation of trays in raised floors and used for the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

### Solutions



RENEWABLE ENERGIES



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                    |                                       |                            |
|----------------------------------------------|--------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC000022           | <b>u</b>                              | 10                         |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 0,215              | <b>Material</b>                       | Steel with surface coating |
| <b>Protection System</b>                     | PG                 | <b>SWL (kg)</b>                       | 65                         |
| <b>Finish</b>                                | PG3, Pregalvanised | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Resistance Class</b>                      | Class 3            | <b>Fire resistance</b>                | A1 No combustible          |
| <b>Width (mm)</b>                            | 90                 |                                       |                            |
| <b>kg/u</b>                                  | 0,067              |                                       |                            |

## 🔒 Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## 🏠 Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Product applications

□ □ □ □ □ □ □ □



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

