


Shoulder Screw M6x20

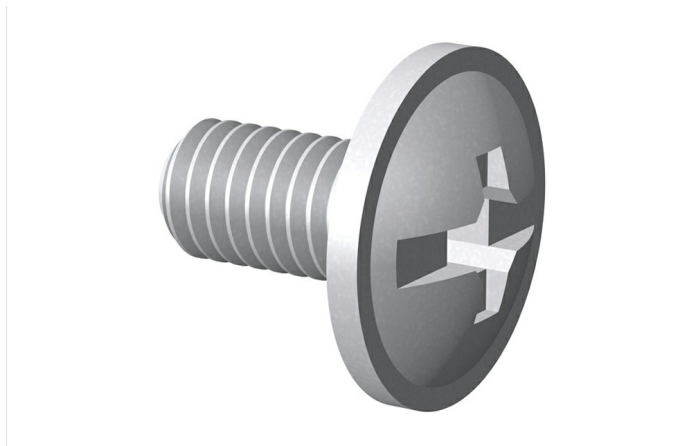

Description

Metal bolt with hemispherical head DIN603 M6x20 for fixing and joining straight sections of Pemsaband® PQU AL trays, supports and any accessory in the facilities. Avoids damaging the cables when they are laid in the trays.

Advantages

DIN603 head screw for fixing and joining accessories in installations with Pemsaband® PQU AL Cable trays.

Thanks to its pan head, prevents damage to the cables when they are routed or laid in the trays.

Suitable for joining straight sections and any accessory from the Pemsaband® PQU AL range.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

High corrosion resistance protection system. GV System and INOX, Stainless steel AISI 316L

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Main technical characteristics

ETIM 10

EC003861

Product data

				Ref	kg/u				
INOX	Class 9D	M 6	20	67060100	0,007	100	Acero inoxidable AISI 316L	-50 / 150 °C	A1 No combustible

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic