


E-MS Enlarger

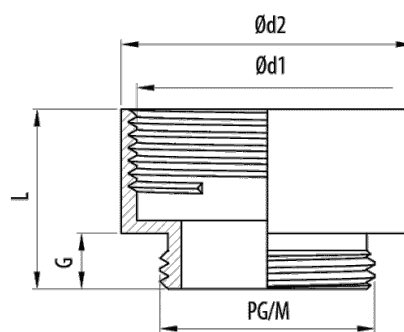

Description

Metal extension for metric and PG thread. Available in different sizes. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for the extension of threads in cable glands and conduit fittings for the protection and management of wiring in general and industrial applications.

Solutions



Main technical characteristics							
LTN	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, M12, M16, M20, M25, M32, M40, M50	Nickel-plated brass	-45 / 150 °C				
LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA				ETIM 10 EC000938			

Product data							
PG 7	5	PG 9	17	15	42020709	0,007	100
PG 9	6	PG11	20	16.5	42020911	0,009	100
PG 9	6	PG13	22	17.5	42020913	0,010	100
PG11	6	PG13	22	17.5	42021113	0,012	100
PG11	6	PG16	24	18.5	42021116	0,013	100
PG13	6.5	PG16	24	19	42021316	0,012	100
PG16	6.5	PG21	30	21	42021621	0,024	50
PG21	7	PG29	39	23	42022129	0,038	50
PG29	8	PG36	50	28	42022936	0,078	25
M12	5	M16	18	15	42051216	0,010	100
M16	6	M20	22	17.5	42051620	0,010	100
M20	6.5	M25	27	19	42052025	0,020	50
M25	8	M32	34	20.5	42052532	0,030	50
M32	7	M40	42	23	42053240	0,050	25
M40	9	M50	53	31	42054050	0,093	25
M50	9.5	M63	65	24	42055063	0,161	10

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12

E-MS Enlarger

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

