


**HEXADIN-M Cablegland** ( Ref: 20050007 )

1/2

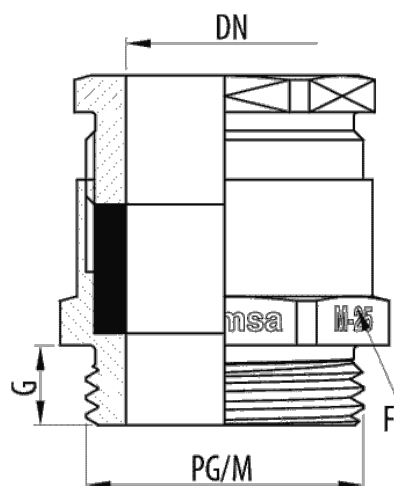

**Description**

Metal cable gland with neoprene seal and an IP54 protection rating in accordance with EN 60529. Available in metric threads from M12 to M63 and in PG7 to PG48 threads for various cable diameters. Made of nickel-plated brass.

**Advantages**

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 60°C.

**Applications**

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

**Solutions**



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                     |                                       |                                              |
|----------------------------------------------|---------------------|---------------------------------------|----------------------------------------------|
| <b>ETIM 10</b>                               | EC000441            | <b>kg/u</b>                           | 0,009                                        |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |                     | <b>u</b>                              | 50                                           |
| <b>Protection System</b>                     | LTN                 | <b>Material</b>                       | LATÓN NIQUELADO,NBR                          |
| <b>Finish</b>                                | Nickel-plated brass | <b>IP</b>                             | IP54                                         |
| <b>M/PG</b>                                  | PG 7                | <b>Working temperature range (°C)</b> | -15 / 60 °C                                  |
| <b>G (mm)</b>                                | 5                   | <b>Fire resistance</b>                | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |
| <b>Cable diameter range</b>                  | 6 / 8               |                                       |                                              |
| <b>L (mm)</b>                                | 20                  |                                       |                                              |
| <b>Torque wrench</b>                         | 14                  |                                       |                                              |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

