


HEXADIN-M-L Cablegland

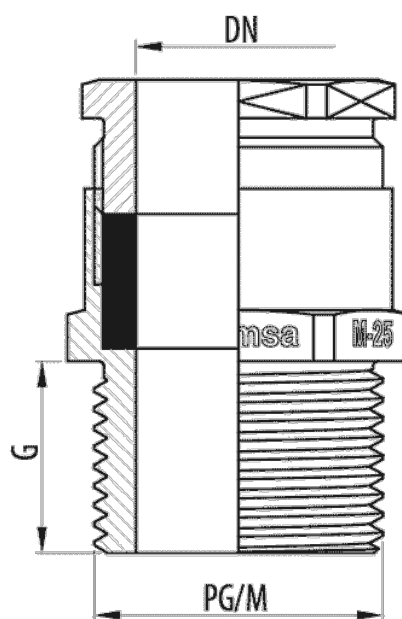

Description

Metal cable gland with neoprene seal and an IP54 protection rating in accordance with EN 60529. Longer length thread available PG7 to PG48 for various cable diameters. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Thread of 15 mm in length.

Working temperature: -25°C to + 60°C.

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions



Main technical characteristics						
LTN	PG11, PG13, PG16, PG21, PG29, PG36, PG48	15	LATÓN NIQUELADO,NBR	IP54	-15 / 60 °C	
LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA		ETIM 10 EC000441				

Product data						
	Ø	L _{mm}	Ø _{mm}	Ref	kg/u	
PG11	6.5 / 12	32	20	20060011	0,024	50
PG13	6.5 / 13.5	35	22	20060013	0,028	50
PG16	6.5 / 16	37	24	20060016	0,036	50
PG21	9 / 20	39	30	20060021	0,054	25
PG29	17 / 28	41	40	20060029	0,102	25
PG36	23 / 34	45	50	20060036	0,155	10
PG48	35 / 46	52	64	20060048	0,308	5

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic