


HEXADIN-M-L Cablegland (Ref: 20060011)

1/2

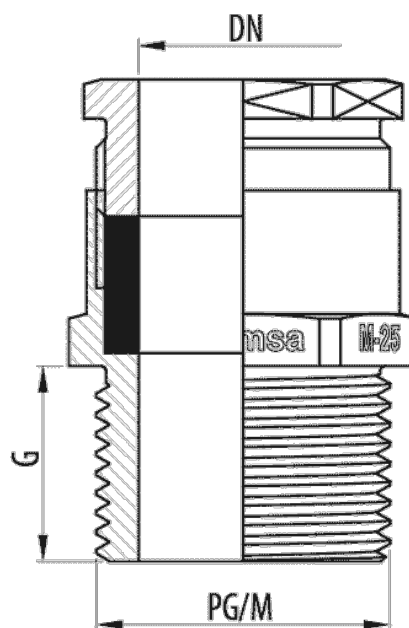

Description

Metal cable gland with neoprene seal and an IP54 protection rating in accordance with EN 60529. Longer length thread available PG7 to PG48 for various cable diameters. Made of nickel-plated brass.

Advantages

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Thread of 15 mm in length.

Working temperature: -25°C to + 60°C.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



