


IRIS EMC Cablegland

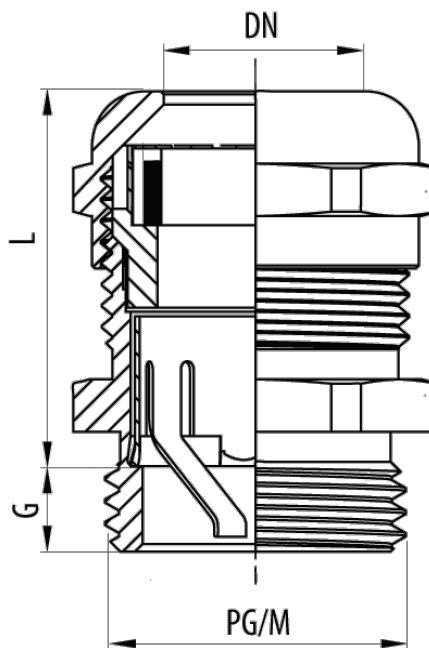

Description

Advantages

Applications

Solutions



Main technical characteristics

LTN	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48, M12, M16, M20, M25, M32, M40, M50, M63		
LATÓN NIQUELADO,NBR,POLIAMIDA	IP68	-20 / 100 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
ETIM 10			
EC000441			

Product data

				L _{mm}		Ref	kg/Li	
PG 7	6	3 / 6.5	9	28	14	21034007	0,017	100
PG 9	6	4 / 8	11	29	17	21034009	0,019	50
PG11	6	5 / 10	14	32	20	21034011	0,025	50
PG13	6.5	6 / 12	16	33	22	21034013	0,030	50
PG16	6.5	10 / 14	18	34.5	24	21034016	0,037	50
PG21	7	13 / 18	22	39.5	30	21034021	0,063	25
PG29	8	18 / 25	30	46	40	21034029	0,129	20
PG36	9	22 / 32	39	57	50	21034036	0,235	10
PG42	12	30 / 38	45	60	58	21034042	0,254	5
PG48	14	34 / 44	51	66	64	21034048	0,348	5
M12	6	3 / 6.5	9	28	14	21035120	0,013	100
M16	7	4 / 8	11	30	18	21035160	0,019	50
M20	8	6 / 12	16	34.5	22	21035200	0,027	50
M25	8	10 / 14	18	36	27	21035250	0,042	25
M32	9	13 / 18	22	41.5	34	21035320	0,074	20
M40	9	18 / 25	30	47	43	21035400	0,146	10
M50	9	22 / 32	39	57	55	21035500	0,257	5
M63	14	34 / 44	51	67	68	21035630	0,399	5

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

IRIS EMC Cablegland**PA6** - Halogen Free Polyamide 6**PA12** - Halogen Free Polyamide 12**PU** - Polyurethane**PE** - Polyethylene**NBR** - NBR rubber**PET** - Thermoplastic Polyester**TPV** - Thermoplastic