


IRIS XL Cablegland

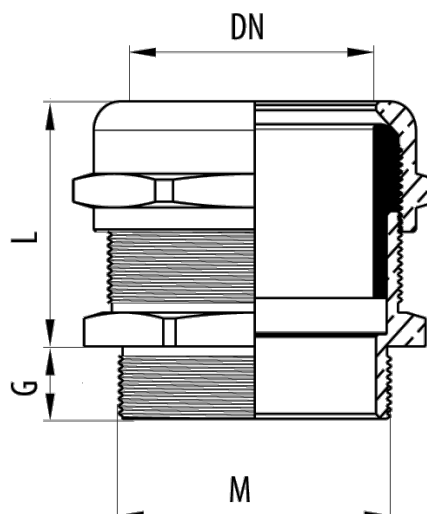

Description

Advantages

Applications

Solutions



Main technical characteristics							
 LTN	 M63, M75, M80, M90	 LATÓN NIQUELADO,NBR	 IP68	 -20 / 100 °C			
 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM 10 EC000441				

Product data							
					Ref	kg/u	
M63	15	45 / 55	63	70	21087630	0,518	5
M75	20	50 / 63	68	85	21087750	0,707	2
M80	20	50 / 63	78	90	21087800	0,877	2
M90	20	60 / 70	81	100	21087900	1,120	1

 Protection System							
CU - Copper electroplated							
PG - Pregalvanised							
EZ - Electrogalvanised							
BC - Electrogalvanised Bichromate							
BK8 - High Resistance Coating							
GC - Hot Dip Galvanising							
INOX - Stainless Steel							
PT - Polyester Paint							
AL - Aluminum							
LN - Brass or Nickel-plated brass							

 Insulating materials							
PC+ABS - Halogen Free Polycarbonate + ABS							
PVC - Polyvinyl Chloride							
PP - Halogen Free Polypropylene							
PA6 - Halogen Free Polyamide 6							
PA12 - Halogen Free Polyamide 12							
PU - Polyurethane							
PE - Polyethylene							
NBR - NBR rubber							
PET - Thermoplastic Polyester							
TPV - Thermoplastic							