


TCM Nut

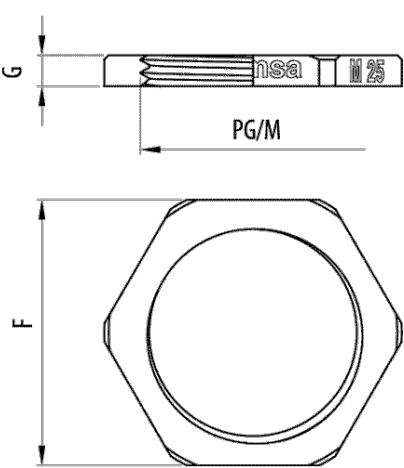

Description

Advantages

Applications

Solutions



Main technical characteristics

 LTN

 PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48, M12, M16, M20, M25, M32, M40, M50, M63

 Nickel-plated brass

 -45 / 150 °C

 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM 10

EC000940

Product data					
			Ref	kg/u	
PG 7	2.8	15	40010007	0,002	100
PG 9	2.8	18	40010009	0,002	100
PG11	3	21	40010011	0,003	100
PG13	3	23	40010013	0,003	100
PG16	3	26	40010016	0,005	100
PG21	3.5	32	40010021	0,007	100
PG29	4	41	40010029	0,012	50
PG36	5	51	40010036	0,019	25
PG42	5	60	40010042	0,029	25
PG48	5.5	64	40010048	0,030	25
M12	2.8	15	40011120	0,002	100
M16	2.8	19	40011160	0,003	100
M20	3	24	40011200	0,004	100
M25	3.5	30	40011250	0,007	100
M32	4	36	40011320	0,010	50
M40	5	46	40011400	0,020	25
M50	5	60	40011500	0,028	25
M63	6	70	40011630	0,046	25

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

TCM Nut

- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

