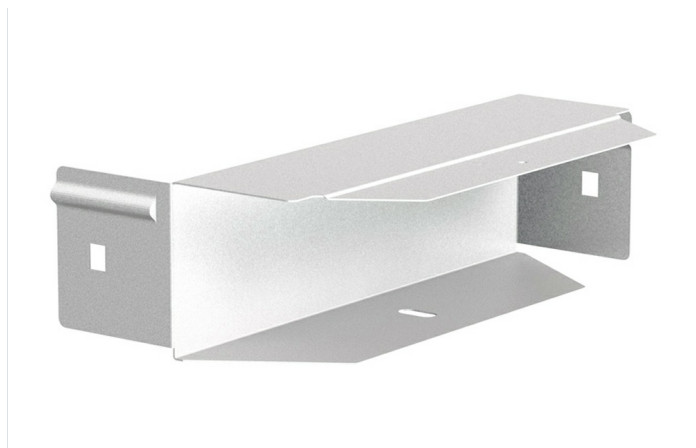


### Description

. Metal cover used as end closure for the range of Pemsaband® One trays ensuring product tightness and a professional finish. . Metal cover used as an end closure for the Megaband® ladder system. . Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems. . Quick connection assembly using the click system, without joints. Made of steel, in various sizes and Protection Systems.

### Advantages

## Applications

. It is used as the closing end of the system of Pemsaband® One perforated and solid trays to improve the sealing and protection of the installation. Applicable in the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector... It is used as a closure on the end of the Megaband® ladder system for the protection of the installation. Applicable in the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

## Solutions



| Product data                          |  |                            |  |
|---------------------------------------|--|----------------------------|--|
| ETIM 10                               |  | EC001574                   |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | 2,239                      |  |
| Protection System                     |  | AZ+                        |  |
| Finish                                |  | ZM High Resistance Alloy   |  |
| Resistance Class                      |  | Class 8                    |  |
| Flange (mm)                           |  | 60                         |  |
| Width (mm)                            |  | 600                        |  |
| kg/u                                  |  | 0,693                      |  |
| u                                     |  | 1                          |  |
| Material                              |  | Steel with surface coating |  |
| IP                                    |  | IP44                       |  |
| Working temperature range (°C)        |  | -50 / 150 °C               |  |
| Fire resistance                       |  | A1 No combustible          |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

## Product applications



