
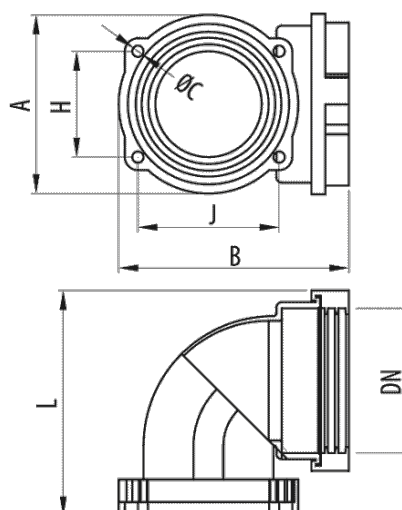


Swivel Angle Connector

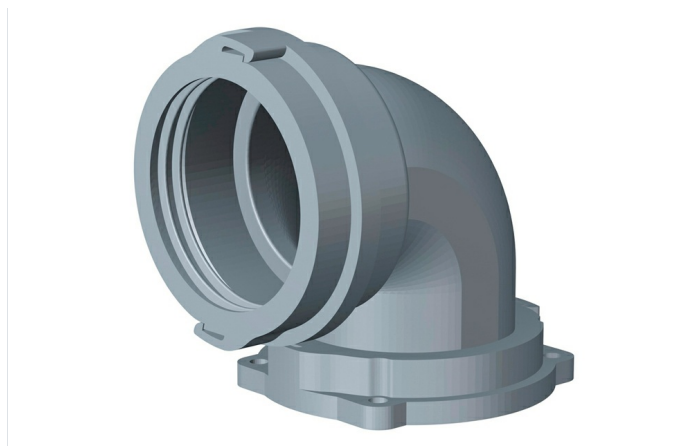

Description

90° angle connector with rotating body and surface fixing ring made of halogen-free self-extinguishing polyamide 6, in RAL 7011 grey and black RAL 9005. Available in various diameters. The connection allows rotation, but not any axial movement. Suitable for large diameter Macroflex® conduits.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

It has a fixing ring with four holes for attaching the conduit to a flat surface.

It has a rotating body that enables the orientation of the 90° angle to be changed for connection to the flexible conduit.

Working temperature: -25°C to + 105°C. Degree of protection IP54 according to classification EN60529.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for fixing large diameter Pemsaflex® and Macroflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

Solutions



Main technical characteristics

 COLOUR	Grey RAL 7011, Black RAL 9005	 DN	NW70, NW95	 C _(mm)	6.5	 kg/u	0,168		10	 M	Polyamide 6		IP54
	-25 / 105 °C		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM 10		EC000936					

Product data

COLOUR	DN	L _(mm)	A _(mm)	B _(mm)	H _(mm)	J _(mm)	REF
Grey RAL 7011	NW70	128	103	131	81	81	33030070
Grey RAL 7011	NW95	166	130	166	110	110	33030095
Black RAL 9005	NW70	128	103	131	81	81	33070070
Black RAL 9005	NW95	166	130	166	110	110	33070095

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic