


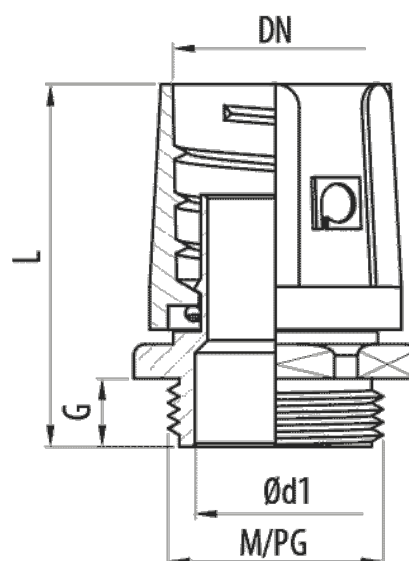

Description

Rotating metal connector with nickel-plated brass inner sleeve and self-extinguishing polyamide 6 insulating outer body for the connection of metal flexible conduits with or without plastic coating, type TM, Ecoflex®, TM-PVC. for DN 9 mm. IP65 protection index. Available in various sizes in both metric and PG threads.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has an independent rotating body that allows the connection of the fitting to the conduit for later connection to the box. The inner metal bush provides electrical continuity of the installation.

Made of brass with external body in polyamide 6, self-extinguishing and halogen-free.

Protection index EN 60529: IP65.

Working temperature: -25°C to + 105°C.

Applications

Suitable for the connection of TM, TM-PVC and Ecoflex® metallic flexible conduits, in the management of electrical cables for building, tertiary and industrial applications.

Solutions



Product data

ETIM 10	EC001180	L (mm)	34
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,020
Protection System	LTN	u	100
Finish	Nickel-plated brass	Material	LATÓN NIQUELADO,POLIAMIDA 6
Colour	Grey RAL 7001	IP	IP65
DN	NW 9	Working temperature range (°C)	-25 / 105 °C
M/PG	M16	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
G (mm)	6		
Ø d1 (mm)	9.2		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic